



Plug and Play T5 & T8 Tubes

High Output / DLC Listed

2FT / 3FT / 4FT / U-Bent

4000K & 5000K



T-Series LED Tubes



The T-Series LED Tubes are commercial grade, energy saving, no-flicker replacements for traditional fluorescent T5 and T8 tubes.

Designed for plug-and-play applications, these LED tubes will operate with your fixture's existing ballast, making re-wiring unnecessary.

And with either a polycarbonate or film-coated glass lens, these lamps are suitable for applications that require shatterproof lighting.

Key Features & Benefits

- High efficacy, DLC listed
- Operates between -4°F - 104°F / -20°C and 40°C
- Ballast compatibility to work with many 120-277V and 347V ballasts*
- Damp location rated and suitable for use in fully enclosed fixtures
- Type A plug and play for direct replacement of 2FT, 3FT, 4FT and 2FT U-Bent fluorescent lamps
- Polycarbonate or film-coated glass lens ensures shatterproof safety
- Non-flicker, no delay, instant on illumination

WHY CHOOSE THIS LAMP?

**POLYCARBONATE OR
FILM-COATED GLASS LENS**

Provides shatterproof safety and protection

FLICKER-FREE


Uses instant-on, no delay, flicker-free technology

UNSURPASSED UNIFORMITY

310 degrees of uniform light distribution from end-to-end

TYPE A LINEAR TUBE

Type A direct plug and play replacement for fluorescent tubes

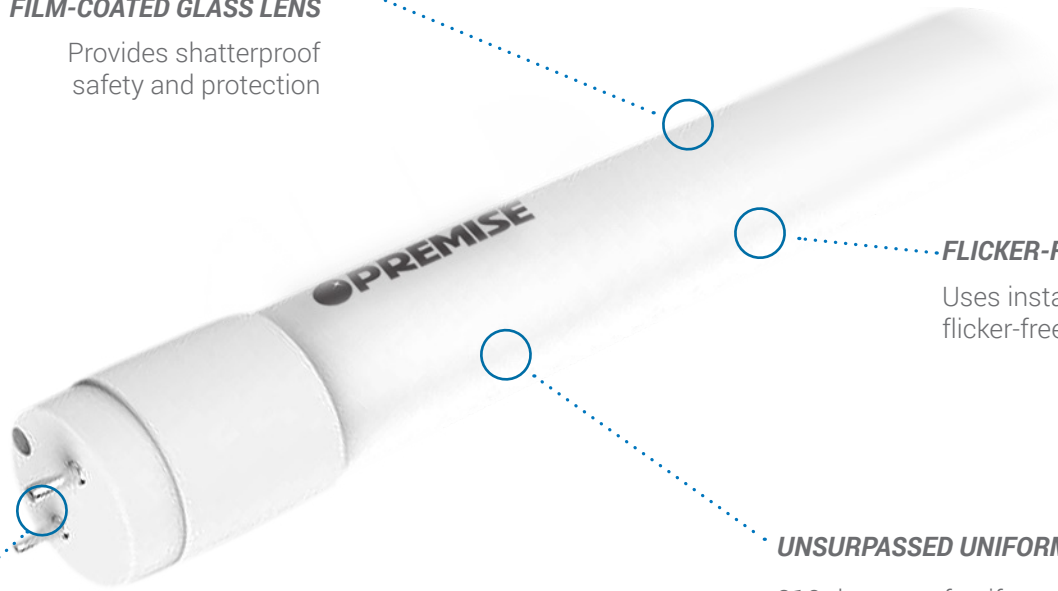

Available Models								
MODEL#	DESCRIPTION	WATTAGE	LUMEN	CRI	CCT	VOLTAGE	DIMENSIONS	TYPE
T51-4264GA	T5 4FT / GLASS	26W	3280	83	4000K	As per ballast	45.8" (L) x 0.7" Φ	Type A Plug and Play
T51-4265GA	T5 4FT / GLASS	26W	3360	83	5000K		22" (L) x 1.07" Φ	
T84-2134GU	T8 U-BENT / GLASS	13W	1850	83	4000K		23.8" (L) x 1.07" Φ	
T84-294GA	T8 2FT / GLASS	9W	1360	81	4000K		35.8" (L) x 1.07" Φ	
T84-3134GA	T8 3FT / GLASS	13W	1625	83	4000K		47.5" (L) x 1" Φ	
T84-4124PA	T8 4FT / PC	12W	1600	82	4000K			
T84-4125PA	T8 4FT / PC	12W	1700	80	5000K			
T84-4184PA	T8 4FT / PC	18W	2300	84	4000K			
T84-4185PA	T8 4FT / PC	18W	2300	84	5000K			

*Always check our Ballast Compatibility List before ordering, visit: premiseled.com/compatibility

Specifications and dimensions subject to change without notice.