



Interchangeable Mounting Options

High Efficacy, Up to 136 lm/W

100-277V & 277-480V

4000K CCT



FL4-Series Multi-Mount Flood Lights



The FL4-Series Multi-Mount Flood Light represents our entry into specification grade exterior lighting. Finished in black, its sleek design and larger housing size provides an attractive look, especially when mounted on poles.

Offering a wide range of mounting options, lumen packages, and integrated controls, they will allow you to achieve any design requirement.

Key Features & Benefits

- Interchangeable mounting options to adapt to any application: yoke, trunnion, slip fitter or mounting arm*
- Operates in -40°F/-40°C degree outdoor weather
- 1-10V dimming for maximum control and energy savings
- IP65 and Wet Location rated
- Black contemporary finish to complement all outdoor environments
- Available with integrated motion sensor (120-277V only, sold separately) and Photocell (120V only, sold separately)

*Fixture does not include a mounting accessory. Mounting option must be added upon ordering.


WHY CHOOSE THIS FIXTURE?

LARGER FORM FACTOR

A sleek and modern look with a housing designed slightly larger to pair well aesthetically with the poles they are installed on

INTERCHANGEABLE MOUNTS

Select from an assortment of mounting options to suit your application

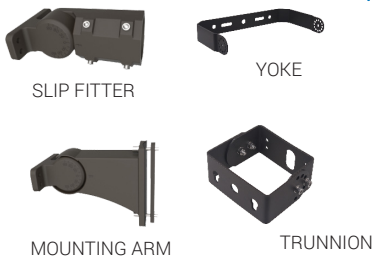

OPTIONAL GLARE SHIELD

Easily add a glare shield and control area lighting to eliminate light trespass



IES DISTRIBUTION TYPE V*

Type V provides a circular pattern for wide, uniform coverage

AVAILABLE INTEGRATED MOTION SENSOR






Blends in with the sleek design of the housing (available for 100-277V models)

*Type IV or Type III distribution also available. Inquire for more information.







Available Models

MODEL#	VOLTAGE	WATTAGE	LUMEN	CRI	BEAM ANGLE	CCT	DIMMABLE
FL4-804T5-1	100-277VAC	80W	11137	80	IES Distribution Type V	4000K	1-10V
FL4-804T5-2	277-480VAC	80W	10921				
FL4-1004T5-1	100-277VAC	100W	14097				
FL4-1004T5-2	277-480VAC	100W	13917				
FL4-1504T5-1	100-277VAC	150W	20501				
FL4-1504T5-2	277-480VAC	150W	20182				
FL4-2004T5-1	100-277VAC	200W	27836				
FL4-2004T5-2	277-480VAC	200W	26773				
FL4-2404T5-1	100-277VAC	240W	32744				
FL4-2404T5-2	277-480VAC	240W	32260				
FL4-3104T5-1	100-277VAC	300W	40323				
FL4-3104T5-2	277-480VAC	300W	40562				
FL4-4504T5-1	100-277VAC	450W	57000				
FL4-4504T5-2	277-480VAC	450W	57375				

Mounting Options

	FL-MA4	Mounting Arm for FL4-Series Area/Flood Lights
	FL-SF4	Slip Fitter for FL4-Series Area/Flood Lights
	FL-TR4	Trunnion Mount for FL4-Series Area/Flood Lights
	FL-YK4	Yoke Mount for FL4-Series Area/Flood Lights (for 80W to 300W models)
	FL-YK4504	Yoke Mount for FL4-Series Area/Flood Lights (for 450W models only)

Accessories

	FL-MSC4-1	Integrated Motion Sensor for FL4-Series Area/Flood Lights (80W - 300W, 100-277V models only)
	FL4-MSC4504-1	Integrated Motion Sensor for FL4-Series Area/Flood Lights (450W, 100-277V models only)
	PC1-TPT-1	Stem Mount Swivel Photocell (for 120V and Mounting Arm or Slip Fitter option only)
	FL-SHIELD14	Glare Shield for FL4-Series Area/Flood Lights (80W/100/150W models only)
	FL-SHIELD24	Glare Shield for FL4-Series Area/Flood Lights (200W/240W/300W models only)
	FL-SHIELD34	Glare Shield for FL4-Series Area/Flood Lights (450W model only)