


Project	
Date	
Prepared by	
Model #	


HBX2-SERIES REFLECTORS



PRODUCT INFORMATION	
Model #	HBX2-REF-AL (100-200W models)
Description	Aluminum reflector, 90° for HBX2
Material	Aluminum
Use	Control glare and maximize downward efficiency
Dimensions	Ø: 16 1/4" (412mm) H: 6 7/16" (164mm)

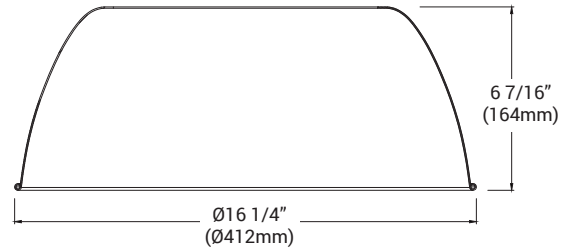

PRODUCT INFORMATION	
Model #	HBX2-REF-AL-L (240-300W models)
Description	Aluminum reflector, 90° for HBX2
Material	Aluminum
Use	Control glare and maximize downward efficiency
Dimensions	Ø: 18 5/8" (473mm) H: 7 3/16" (182mm)

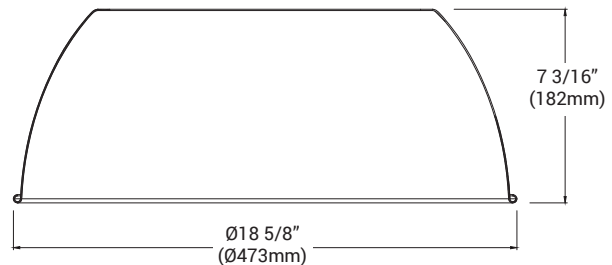




HBX2-SERIES REFLECTORS


Project	
Date	
Prepared by	
Model #	




PRODUCT INFORMATION	
Model #	HBX2-REF-PC (100-200W models)
Description	Prismatic reflector, 90° for HBX2
Material	Polycarbonate
Use	Control glare, gain uplighting and achieve wider area lighting
Dimensions	Ø: 16 5/16" (414mm) H: 6 5/16" (160mm)

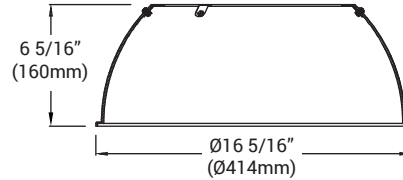

PRODUCT INFORMATION	
Model #	HBX2-REF-PC-L (240-300W models)
Description	Prismatic reflector, 90° for HBX2
Material	Polycarbonate
Use	Control glare, gain uplighting and achieve wider area lighting
Dimensions	Ø: 16 1/4" (412mm) H: 5 13/16" (148mm)

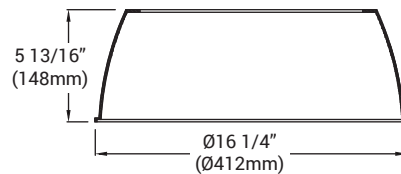

PRODUCT INFORMATION	
Model #	HBX2-REF-CL (all models)
Description	Cone lens attachment prismatic reflector for HBX2-series
Material	Polycarbonate
Use	Attaches to the bottom of the prismatic reflector to diffuse light, control glare at lower mounting heights and enclose the fixture.
Dimensions	Ø: 15 15/16" (405mm) H: 1 9/16" (40mm)

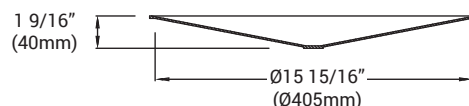

Specifications and dimensions subject to change without notice.