



WP2 SERIES ADJUSTABLE WALL PACK

INSTALLATION INSTRUCTIONS



For use with:

Adjustable Wall Packs

WP2-204-1 | WP2-205-1 | WP2-304-1
WP2-305-1 | WP2-704-1 | WP2-705-1
WP2-704-2 | WP2-705-2

WHAT'S IN THE BOX

- LED FIXTURE
- MOUNTING HARDWARE

WHAT YOU'LL NEED

- SAFETY GLASSES
- WIRE CUTTERS
- SCREW DRIVER
- OUTDOOR SILICON SEALANT
- WIRING SUPPLIES AS PER ELECTRICAL CODE

WARNING

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. recognized.

IMPORTANT

Before assembling your fixture, please make sure that you carefully read through this instruction sheet. Consider having your fixture installed by a qualified licensed electrician.

Note: The important safeguards and instructions that appear in this sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

PREMISE LED Inc.
82-86 Carrier Drive
Toronto, ON Canada
M9W 5R1
PREMISELED.COM

INSTALLATION STEPS

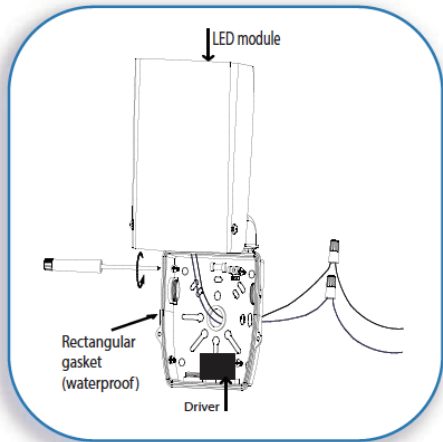


FIGURE 1

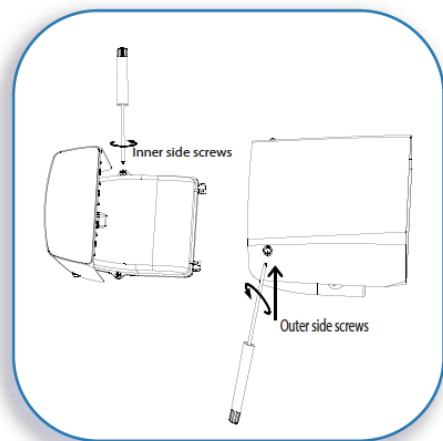


FIGURE 2

1. Disconnect the power by turning off the circuit breaker. Loosen both outer side screws of the fixture, open the housing, and then loosen both inner side screws.
2. Expose the supply wires from the J-box. Mount the mounting box to the J-box with the supplied screws, gently pull the supply wires through the hole in the back housing, then connect the black supply wire to the black/brown fixture wire. Secure with the supplied wire nuts. Next, connect the white supply wires to the white/blue fixture wire and secure with the supplied wire nuts. Wrap the green wire around one of the protruding screw or connect it to the supply ground wire. Secure all wires with electrical tape (not supplied) and tuck into the mounting box. (Figure 1).
3. Tighten the inner side screws, close the housing, then tighten the outer side screws. (Figure 2).
4. Restore the electricity and check the operation of the new wall pack fixture.

NOTE: This fixture is wet location rated. In order to ensure that moisture does not enter the outlet box and cause a short circuit, clear caulking should be used to seal the space between the fixture mounting bracket and the wall. Ensure that a space is left at the bottom to allow for the escape of moisture. It is recommended that outdoor silicon sealant be used for that purpose.