

### INSTALLATION INSTRUCTIONS



#### WHAT'S IN THE BOX

- LED FIXTURE
- MOUNTING HARDWARE

#### WHAT YOU'LL NEED

- SAFETY GLASSES
- SCREW DRIVER
- WIRE CUTTERS
- WIRING SUPPLIES AS SPECIFIED BY CODE

#### WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Prevent wire damage by avoiding exposure to edges of sheet metal or sharp objects.
- Modifications to the product voids the warranty.

For use with:

LED Wall Sconce Fixture

WS-SAT1015-3 | WS-SAT1015-4

#### IMPORTANT


Before assembling your fixture, please make sure that you carefully read through this instruction sheet. Consider having your fixture installed by a qualified licensed electrician.

**Note:** The important safeguards and instructions that appear in this sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

PREMISE LED Inc.  
82-86 Carrier Drive  
Toronto, ON Canada  
M9W 5R1  
PREMISELED.COM


## INSTALLATION OPTIONS

The WS Series Wall Sconce fixture is designed to be installed via a wall junction box.

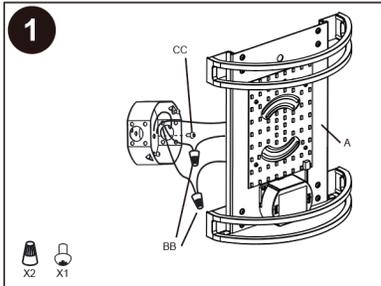


Connect the fixture wires to the supply wires: black to black, white to white, green to copper/bare/outlet by groundscrew (CC). Once wire connections are made, secure each with a wire nut (BB).

**WARNING:** If there is no ground supply wire, stop installation and consult a qualified electrician.

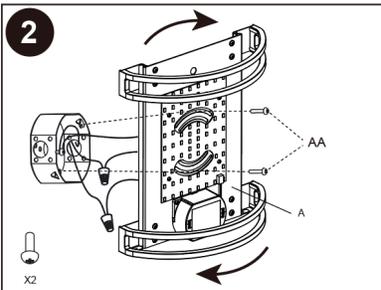

Locate the fixture housing (A) over the outlet box, put the long screw (AA) through the long hole slot on the fixture housing (A), and thread it into the outlet box (B). Tighten the two long screws.

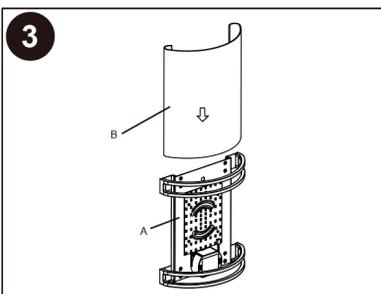

Align the tabs on the fixture pan (A) with the channels on the lens (B), then insert lens (B) into fixture pan (A).

**WARNING:** Make sure the upper lip of the lens (B) is secured completely by the tabs on fixture pan (A). If not, the lens (B) could potentially fall and break.