



Model #	
Type	
Project	
Date	

CW3-SERIES

COMMERCIAL WRAPAROUND



The CW3-Series is a high-performing general indoor-use luminaire made for projects where budget is a priority. Designed to save energy and meet low light egress requirements, this fixture is perfect for a range of environments including offices, stairways and bathrooms. With a convenient 4' length, it can be surface mounted to replace most existing fluorescent fixture applications.



HIGHLIGHTS



- Up to 116 lumen/W
- 80+ CRI
- Diffuser lens minimizes glare and visual fatigue
- Projected lifetime L70 of >50,000 hours
- 0-10V dimming for maximum control and energy savings
- Designed with the contractor in mind, enabling quick surface mount installs directly to the j-box
- Used in parking garages, corporate and retail settings
- Backed by a worry-free 5 year warranty



APPLICATIONS

Used in parking garages, stairways, bathrooms, hallways, multipurpose rooms, conference rooms and retail settings.

DIMENSIONS					
VOLTAGE (V)	POWER (W)	L (inches/mm)	W (inches/mm)	H (inches/mm)	WEIGHT (kg/lbs)
100-277V	40W	47 5/8" (1210 mm)	5 5/16" (135 mm)	2 1/8" (54 mm)	1.7 kg / 3.8 lbs

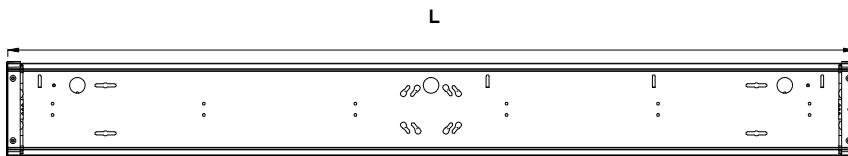

ORDERING GUIDE

SERIES	POWER (W)	CCT	VOLTAGE & DIMMING
CW3	40: 40W	4: 4000K	1: 120-277V, 0-10V dimming

MODEL SELECTION					
SERIES	-	POWER (W)	CCT	-	VOLTAGE
CW3	-	40	4	-	1

EXAMPLE: CW3-404-1

PRODUCT FEATURES

CONSTRUCTION

- Powder coated white steel housing
- Polycarbonate diffuser lens

ELECTRICAL

- 0-10V dimming, dim-to-off

INSTALLATION

- Surface mount to junction box

LISTINGS & RATINGS

- DLC Standard PL86H9DM151V
- cULus E473127
- Damp Location
- Listed for use in:
- -20°C to 50°C / -4°F to 122°F

RATED LIFE & WARRANTY

- LED system: >50,000 hours at L70
- 5 year warranty
(visit premiseled.com/warranty/)

ORDERING INFORMATION

INPUT VOLTAGE	POWER (W)	CCT (K)	MODEL NUMBER	DELIVERED LUMENS (lm)	EFFICACY (lm/W)
120-277V	40W	4K	CW3-404-1	4,640 lm	116 lm/W

PACKING INFORMATION

MODEL	CASE QUANTITY	PALLET QUANTITY
40W	CASE OF 4	120

ELECTRICAL INFORMATION

INPUT VOLTAGE	POWER (W)	APPARENT POWER (VA)	SYSTEM POWER (W)	CURRENT DRAW AT 120V _{ac}	CURRENT DRAW AT 208V _{ac}	CURRENT DRAW AT 240V _{ac}	CURRENT DRAW AT 277V _{ac}
120-277V	40W	40.0VA	49.0W	0.330A	0.190A	0.170A	0.140A

INPUT VOLTAGE	POWER (W)	INRUSH CURRENT (A)	DRIVER SURGE PROTECTION
120-277V	40W	<40A	L/N-PE: 2.5kV, L-N: 2.5kV

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
 2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
 3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty