



Available in: 90W / 130W / 165W / 220W

Power Selectable High Wattage Models:
320W / 290W / 260W

120-277V, 120-277/347V & 120-347V

4000K or 5000K



LHB4-Series Linear High Bays



The LHB4-Series Linear High Bay provides high efficacy and energy savings to projects that require optimized lighting in high ceiling applications. These linear high bays are the energy efficient replacements for traditional fluorescent fixtures and HID highbays.

With a contemporary design and high quality optics, our LHB4-Series is a no-brainer for your next warehouse, shopping centre, manufacturing, or gymnasium project.


Key Features & Benefits

- Up to 136 lumens/W
- Available in 120-277V, 120-277/347V, and 120-347V models
- Flexible mounting options: v-hooks with chain (included) or aircraft cable, pendant, surface mount, threaded rod and ganging (optional accessories)
- Comes pre-corded with a 10-foot white whip
- Emergency Battery Backup Kit available for continuous operation of lights in emergency mode in the event of power failure
- Includes receptacle for simple plug-and-play fixture-mounted microwave or PIR sensors
- 0-10V dimming

WHY CHOOSE THIS FIXTURE?

AVAILABLE KNOCK OUTS

For easy installation of controls or daisy chaining

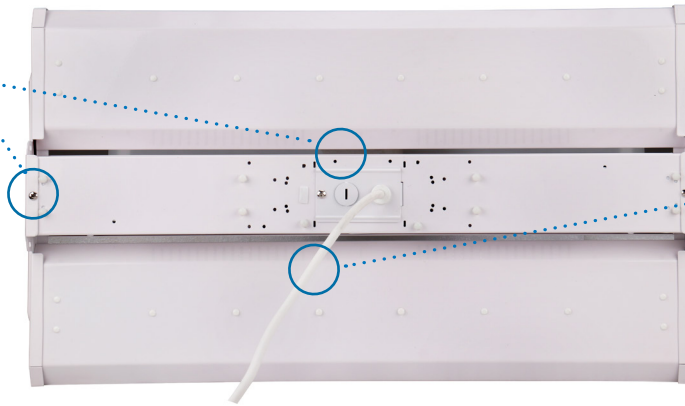

PRE-INSTALLED 10" CORD

Makes installation and servicing easy

POWER SELECT MODELS AVAILABLE

High wattage power selectable models available (320/290/260W)



SENSOR READY

Includes receptacle for simple plug-and-play fixture mounted microwave or PIR sensors

OPTIONAL MOUNTING ACCESSORIES



AIRCRAFT CABLE



PENDANT MOUNT



GANGING KIT



THREADED ROD MOUNT

AVAILABLE SENSORS




MICROWAVE SENSOR



PIR SENSOR

AVAILABLE WIREGUARDS



WIRE GUARDS

120-277V Models

MODEL#	VOLTAGE	WATTAGE	LUMEN	CRI	CCT	OPERATION RANGE	DIMMING
LHB4-904-1	120-277V	90W	12,200 lm	80+	4000K	-40°F to +122°F / -40°C to +50°C	0-10V
LHB4-905-1		90W	12,200 lm		5000K		
LHB4-1304-1		130W	18,000 lm		4000K		
LHB4-1305-1		130W	18,000 lm		5000K		
LHB4-1654-1		165W	22,500 lm		4000K		
LHB4-1655-1		165W	22,500 lm		5000K		
LHB4-2204-1		220W	30,000 lm		4000K		
LHB4-2205-1		220W	30,000 lm		5000K		

Power Selectable 120-277V Models

MODEL#	VOLTAGE	WATTAGE	LUMEN	CRI	CCT	OPERATION RANGE	DIMMING
LHB4-320G4-1	120-277V	320/290/260W	43,500 lm	80+	4000K	-40°F to +122°F / -40°C to +50°C	0-10V
LHB4-320G5-1		320/290/260W	43,500 lm		5000K		

120-277/347V and 120-347V Models

MODEL#	VOLTAGE	WATTAGE	LUMEN	CRI	CCT	OPERATION RANGE	DIMMING
LHB4-904-3	120-347V	90W	12,200 lm	80+	4000K	-40°F to +122°F / -40°C to +50°C	0-10V
LHB4-905-3	120-347V	90W	12,200 lm		5000K		
LHB4-1304-3	120-347V	130W	18,000 lm		4000K		
LHB4-1305-3	120-347V	130W	18,000 lm		5000K		
LHB4-1654-3	120-277/347V	165W	22,500 lm		4000K		
LHB4-1655-3	120-277/347V	165W	22,500 lm		5000K		
LHB4-2204-3	120-277/347V	220W	30,000 lm		4000K		
LHB4-2205-3	120-277/347V	220W	30,000 lm		5000K		

Power Selectable 120-347V Models

MODEL#	VOLTAGE	WATTAGE	LUMEN	CRI	CCT	OPERATION RANGE	DIMMING
LHB4-320G4-3	120-347V	320/290/260W	43,500 lm	80+	4000K	-40°F to +122°F / -40°C to +50°C	0-10V
LHB4-320G5-3		320/290/260W	43,500 lm		5000K		

Available Accessories

MODEL#	DESCRIPTION
MSF-DMR-12	Microwave sensor, fixture only mount for HBV2/LHB4, 12V
MSF-DPR-12	PIR sensor, fixture only mount for HBV2/LHB4, 12V
LHB4-WG	Wire Guard for 90-165W models
LHB4-WG-M	Wire Guard for 220W models
LHB4-WG-L	Wire Guard for 320W models
LHB4-TRSMK	Threaded rod surface mount kit for 90-220W models
LHB4-TRSMK-L	Threaded rod surface mount kit for 320W models
LHB4-PMK	Pendant Mounting Kit for LHB4, 90-220W models
LHB4-PMK-L	Pendant Mounting Kit for LHB4, 320W models
LHB4-ACK	Aircraft Cable kit for all models
LHB4-GK	Ganging Kit for LHB4, 90-220W models