



VAN Lenexa Vanity

FEATURES

- FieldCCeT feature allows for multiple “set and forget” CCT options on select fixtures

CERTIFICATIONS

- ETL Listed for damp locations
- ENERGY STAR® Approved for superior energy efficiency

PERFORMANCE

- Rated lifetime:
 - L70: >35,000 hours
 - CRI: >80; >90

ELECTRICAL

- Input voltage: 120V
- 0-10V dimming; Triac dimming
- Power Factor: >0.9
- THD: <20%

THERMAL

- 4°F to 104°F (-20°C to 40°C) operating temperature

CONSTRUCTION

- Durable polycarbonate lens
- Steel body

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



VANLX2



VANLX3



VANLX4

APPLICATIONS

- Hospitality
- Multi-family residential
- Hallways
- Restrooms

CONFIGURATOR


MODEL	LUMENS	WATTS	CRI/CCT	VOLTAGE	DIMMING	FINISH
VANLX2 : Lenexa Vanity Light 2'	210 - 2,100 lm	28W - 28W	830 - 80 CRI; 3000K 9CCT3 - 90 CRI; 27/30/4000K	120 - 120V	[Blank] - Triac Dimming D - 0-10V Dimming	NI - Nickel
VANLX3 : Lenexa Vanity Light 3'	300 - 3,000 lm	40W - 40W	830 - 80 CRI; 3000K 9CCT3 - 90 CRI; 27/30/4000K		[Blank] - Triac Dimming D - 0-10V Dimming	
VANLX4 : Lenexa Vanity Light 4'	400 - 4,000 lm	55W - 55W 56W - 56W	830 - 80 CRI; 3000K 9CCT3 - 90 CRI; 27/30/4000K		[Blank] - Triac Dimming D - 0-10V Dimming	



PERFORMANCE SUMMARY

ORDER CODE	ITEM #	LENGTH	WATTS	NOMINAL LUMENS	LPW	CCT	CRI	VOLTS	DIMMING	ENERGY STAR
11372	VANLX2-210-28W-830-120-NI	2'	28W	2,100	75	3000K	>80	120V	Triac	★
11369	VANLX2-210-28W-9CCT3-120D-NI	2'	28W	2,100	75	27/30/4000K	>90	120V	0-10V	★
11373	VANLX3-300-40W-830-120-NI	3'	40W	3,000	75	3000K	>80	120V	Triac	★
11370	VANLX3-300-40W-9CCT3-120D-NI	3'	40W	3,000	75	27/30/4000K	>90	120V	0-10V	★
11374	VANLX4-400-55W-830-120-NI	4'	55W	4,000	72	3000K	>80	120V	Triac	★
11371	VANLX4-400-56W-9CCT3-120D-NI	4'	56W	4,000	71	27/30/4000K	>90	120V	0-10V	★


PRODUCT DIMENSIONS

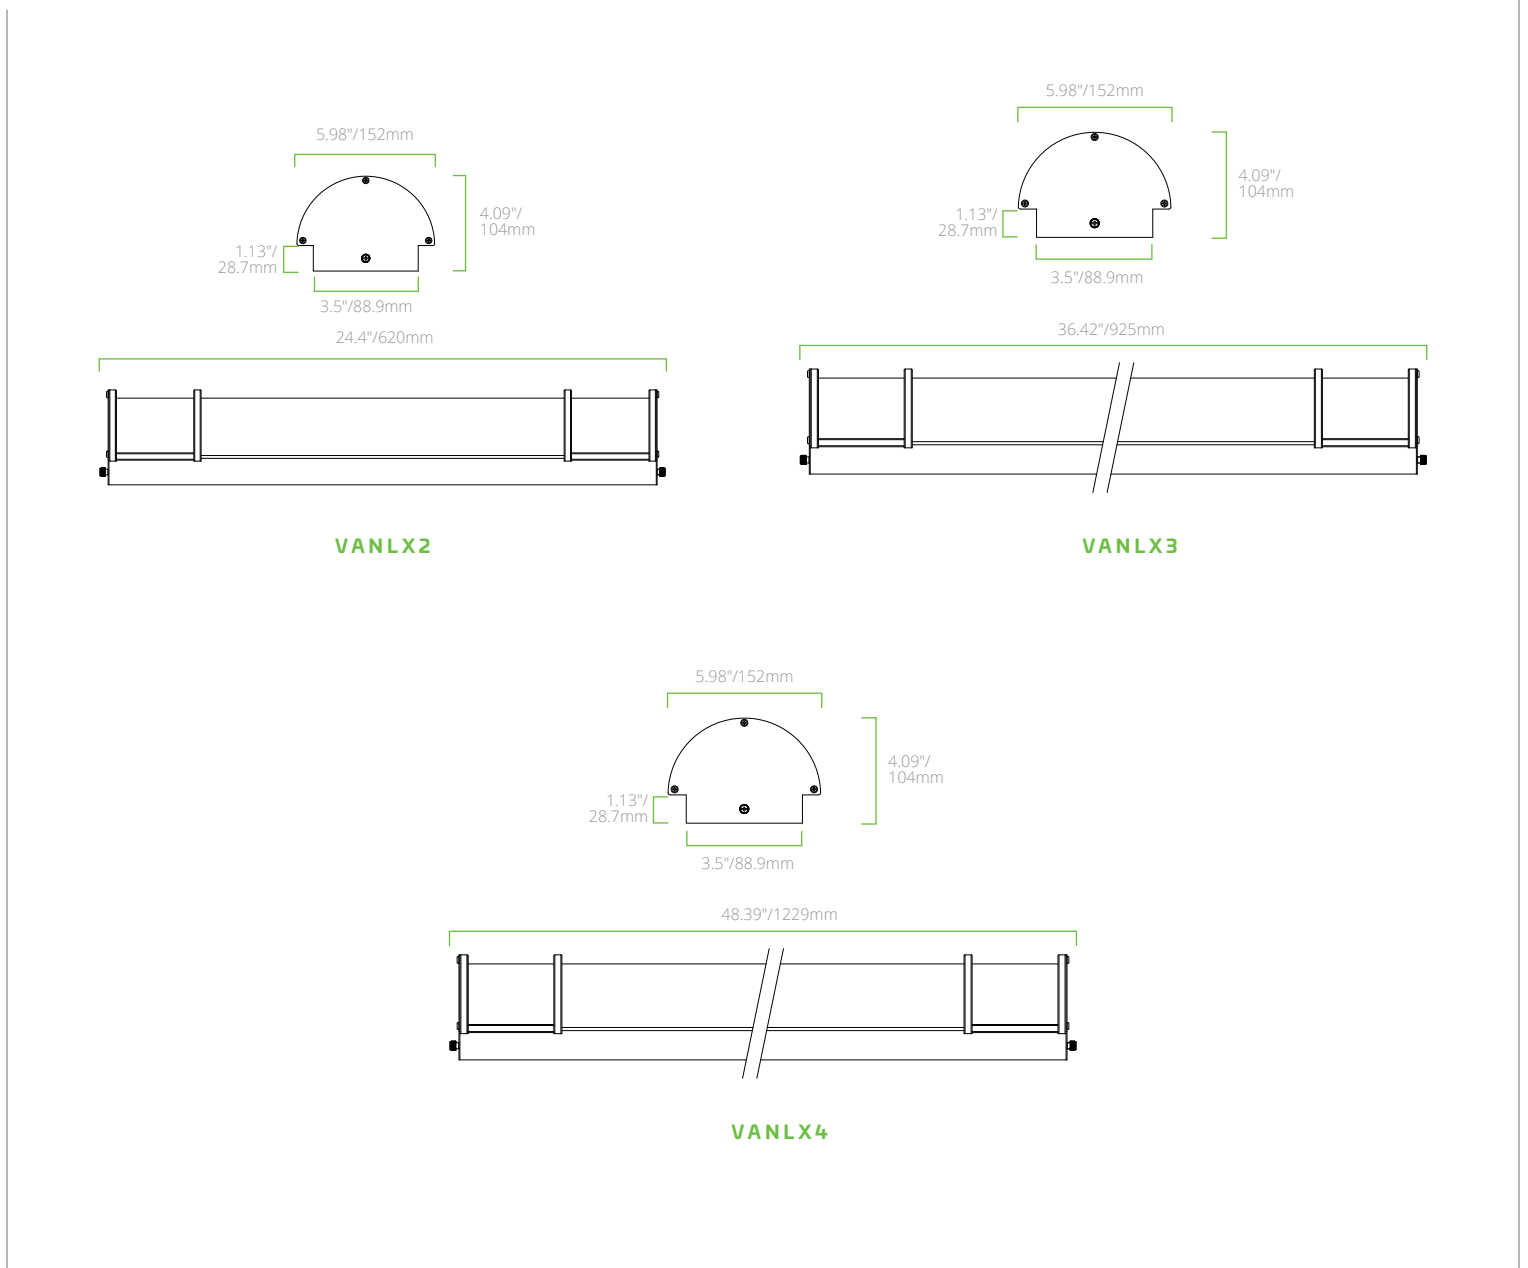

PHOTOMETRICS


VANLX2-210-28W-830-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	191.44	8.9%
0-30	408.91	19.0%
0-40	676.16	31.4%
0-60	1239.1	57.5%
0-80	1670.2	77.6%
0-90	1808.94	84.0%
90-180	344.76	16.0%
0-180	2153.71	100%




VANLX2-210-28W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	176.26	8.4%
0-30	376.84	18.1%
0-40	624.29	29.9%
0-60	1152.65	55.2%
0-80	1571.51	75.3%
0-90	1713.26	82.1%
90-180	374.34	17.9%
0-180	2087.6	100%




VANLX3-300-40W-830-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	280.32	9.0%
0-30	598.96	19.2%
0-40	990.40	31.7%
0-60	1812.59	58.0%
0-80	2434.45	77.9%
0-90	2630.38	84.2%
90-180	494.18	15.8%
0-180	3124.56	100%




VANLX3-300-40W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	269.63	9.0%
0-30	576.40	19.3%
0-40	953.64	31.9%
0-60	1745.57	58.4%
0-80	2338.58	78.3%
0-90	2421.23	84.4%
90-180	465.66	15.6%
0-180	2986.89	100%



VANLX4-40055W-830-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	384.90	9.1%
0-30	821.93	19.4%
0-40	1358.03	32.1%
0-60	2479.38	58.6%
0-80	3318.54	78.4%
0-90	3479.44	84.5%
90-180	654.95	15.5%
0-180	4233.68	100%



VANLX4-400-56W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	363.14	9.0%
0-30	776.48	19.2%
0-40	1284.98	31.7%
0-60	2354.25	58.1%
0-80	3159.95	78.0%
0-90	3410.81	84.2%
90-180	641.19	15.8%
0-180	4052.00	100%

