



VAN Lenexa Vanity - LED

HIGHLIGHTS

- Available in 3 lengths; 2', 3', 4'
- Nickel Trim
- FieldCCeT feature allows for multiple "set and forget" CCT options on select fixtures

CERTIFICATIONS

- ETL Listed
- RoHS Compliant
- FCC Compliant
- Damp Location Rated
- ENERGY STAR® Approved for superior energy efficiency

PERFORMANCE

- High Efficacy, up to 75 lm/W
- Available in fixed wattage models: 28W, 40W, 55W or 56W
- Available in single CCT models: 3000K or FieldCCeT models: field-selectable CCT 27/30/4000K
- CRI: >80, >90
- Average Rated Lifetime: L70: >35,000 hours

ELECTRICAL

- Input voltage: 120V
- 0-10V dimming; Triac dimming
- Power Factor: >0.9
- THD: <20%

THERMAL

- -4°F to 104°F (-20°C to 40°C) ambient operating temperature

CONSTRUCTION

- Durable polycarbonate lens
- Steel body
- Nickel Trim

WARRANTY

- 5 Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

project name	type
catalog number	voltage
approved by	date



VANLX2



VANLX3



VANLX4



APPLICATIONS

- Hospitality
- Multi-family residential
- Hallways
- Restrooms

KEY FEATURES

MULTIPLE SIZES

Fixture is available in 3 lengths; 2', 3' or 4'.



AVAILABLE IN 3 LENGTHS

TRIAC DIMMING

Easily dim the fixture via triac dimming.

TRIAC DIMMING



SELECTABLE CCT

SELECTABLE CCT OPTION

Reduce SKU's with Selectable CCT allowing the installer to choose from 3 CCT's: 27/30/4000K.



NICKEL TRIM




AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	SIZE	WATTS	CCT	LUMENS	EFFICACY (lm/W)	CRI	VOLTAGE	DIMMING	ENERGY STAR
	11372	VANLX2-210-28W-830-120-NI	2'	28W	3000K	2100 lm	75 lm/W	>80	120V	Triac	★
	11369	VANLX2-210-28W-9CCT3-120D-NI	2'	28W	27/30/4000K	2100 lm	75 lm/W	>90	120V	0-10V	★
	11373	VANLX3-300-40W-830-120-NI	3'	40W	3000K	3000 lm	75 lm/W	>80	120V	Triac	★
	11370	VANLX3-300-40W-9CCT3-120D-NI	3'	40W	27/30/4000K	3000 lm	75 lm/W	>90	120V	0-10V	★
	11374	VANLX4-400-55W-830-120-NI	4'	55W	3000K	4000 lm	72 lm/W	>80	120V	Triac	★
	11371	VANLX4-400-56W-9CCT3-120D-NI	4'	56W	27/30/4000K	4000 lm	71 lm/W	>90	120V	0-10V	★

MODEL CONFIGURATOR											
MODEL	SIZE	-	WATTS	-	CRI/CCT	-	VOLTAGE	DIMMING	-	COLOR	
VANLX		-		-		-			-	NI	

EXAMPLE PART NUMBER: VANLX4-400-55W-830-120-NI


PRODUCT DIMENSIONS

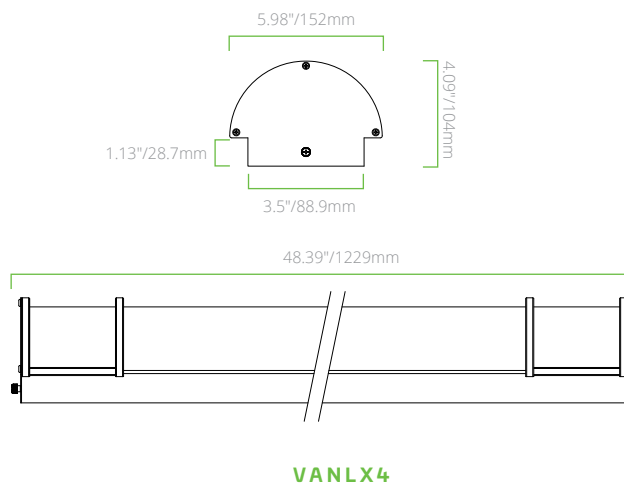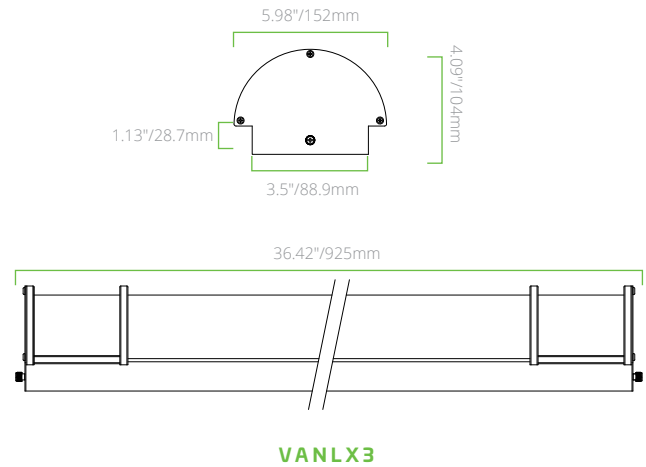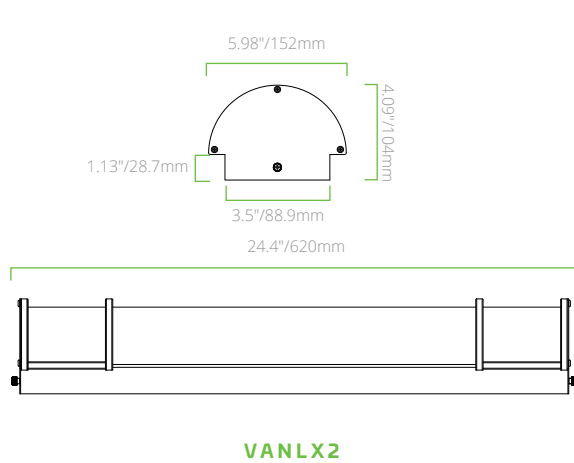

PHOTOMETRICS


VANLX2-210-28W-830-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	191.44	8.9%
0-30	408.91	19.0%
0-40	676.16	31.4%
0-60	1239.1	57.5%
0-80	1670.2	77.6%
0-90	1808.94	84.0%
90-180	344.76	16.0%
0-180	2153.71	100%

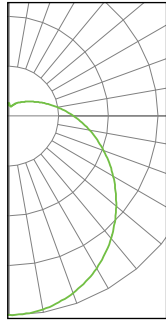


VANLX2-210-28W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	176.26	8.4%
0-30	376.84	18.1%
0-40	624.29	29.9%
0-60	1152.65	55.2%
0-80	1571.51	75.3%
0-90	1713.26	82.1%
90-180	374.34	17.9%
0-180	2087.6	100%

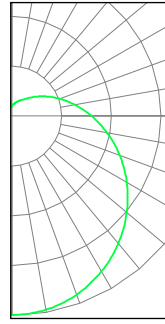


VANLX3-300-40W-830-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	280.32	9.0%
0-30	598.96	19.2%
0-40	990.40	31.7%
0-60	1812.59	58.0%
0-80	2434.45	77.9%
0-90	2630.38	84.2%
90-180	494.18	15.8%
0-180	3124.56	100%




VANLX3-300-40W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	269.63	9.0%
0-30	576.40	19.3%
0-40	953.64	31.9%
0-60	1745.57	58.4%
0-80	2338.58	78.3%
0-90	2421.23	84.4%
90-180	465.66	15.6%
0-180	2986.89	100%

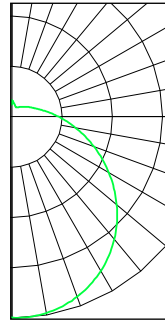

VANLX4-40055W-830-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	384.90	9.1%
0-30	821.93	19.4%
0-40	1358.03	32.1%
0-60	2479.38	58.6%
0-80	3318.54	78.4%
0-90	3479.44	84.5%
90-180	654.95	15.5%
0-180	4233.68	100%



VANLX4-400-56W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	363.14	9.0%
0-30	776.48	19.2%
0-40	1284.98	31.7%
0-60	2354.25	58.1%
0-80	3159.95	78.0%
0-90	3410.81	84.2%
90-180	641.19	15.8%
0-180	4052.00	100%

