



WESTPORT Cylinder Wall Sconce Cylinder Surface Mount

FEATURES

- Provides comfortable diffused light
- Switchable array to conveniently funnel light up, down or both up and down simultaneously (CWSP models only)
- Integrated photocell ON/OFF switch to easily disable photo control based on installation needs (CWSP & CWSW 6" models only)
- FieldCCeT features provides multiple color temperature settings in one fixture

CERTIFICATIONS

- UL Listed for US & Canada
- RoHS Compliant
- FCC Compliant
- Dry Location Rated for Surface Mount
- Wet Location Rated for Wall Sconce
- ENERGY STAR® Approved for superior energy efficiency

PERFORMANCE

- Available in fixed wattage models: 30W and PowerSet models: power-selectable; 5/10W, 10/20W, 18/36W
- Available in FieldCCeT models: field-selectable CCT 30/40/5000K
- CRI: >80; >90
- Beam angles, 50°/ 80° depending on size
- Rated lifetime L70 > 50,000 hours

ELECTRICAL

- Input voltage: 120-277V
- Surge protection: up to 2kV
- Power Factor: >0.9
- THD: <20%

THERMAL

- -22°F to 122°F (-30°C to 50°C) ambient operating temperature

CONSTRUCTION

- Aluminum construction
- Black or bronze finish

WARRANTY

- 5-Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

project name	type
catalog number	voltage
approved by	date



3" WALL SCONCE
(SWITCHABLE ARRAY)



4" WALL SCONCE
(SWITCHABLE ARRAY)



6" WALL SCONCE
(SWITCHABLE ARRAY)



6" SURFACE MOUNT
(1 LIGHT)



OPTIONAL PENDANT
MOUNT ACCESSORY



RoHS Compliant



APPLICATIONS

- Residential
- Hospitality
- Multi Family
- Retail

KEY FEATURES

SWITCHABLE ARRAY

Switchable array to conveniently funnel light up, down or both up and down simultaneously (CWSP models only).

SELECTABLE CCT

Choose your CCT upon install. Great for SKU reduction and job site flexibility.

INTEGRATED PHOTOCELL

Easily disable photo control based on installation needs with ON/OFF switch (CWSP & CWSW 6" models only).



AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	SIZE	WATTS	CCT	LUMENS	CRI	VOLTS	PHOTO CELL	FINISH	WET/DRY LOCATION	BEAM	ENERGY STAR®
	12547	CWSP3S/10W/8CCT3/UNV/PC/BK	3"	5/10W	30/40/5000K	800 lm	>80	120-277V	✓	Black	Wet	50°	★
	12548	CWSP3S/10W/8CCT3/UNV/PC/BZ	3"	5/10W	30/40/5000K	800 lm	>80	120-277V	✓	Bronze	Wet	50°	★
	12549	CWSP4S/20W/8CCT3/UNV/PC/BK	4"	10/20W	30/40/5000K	1600 lm	>80	120-277V	✓	Black	Wet	50°	★
	12550	CWSP4S/20W/8CCT3/UNV/PC/BZ	4"	10/20W	30/40/5000K	1600 lm	>80	120-277V	✓	Bronze	Wet	50°	★
	12526	CWSP6S/36W/8CCT3/UNV/PC/BK	6"	18/36W	30/40/5000K	3600 lm	>80	120-277V	✓	Black	Wet	80°	★
	12527	CWSP6S/36W/8CCT3/UNV/PC/BZ	6"	18/36W	30/40/5000K	3600 lm	>80	120-277V	✓	Bronze	Wet	80°	★
	12528	CSMWP61/30W/8CCT3/UNV/DIM/BK	6"	30W	30/40/5000K	3000 lm	>80	120-277V		Black	Dry	80°	★
	12551	CSMWP61/30W/8CCT3/UNV/DIM/BZ	6"	30W	30/40/5000K	3000 lm	>80	120-277V		Bronze	Dry	80°	★

MODEL CONFIGURATOR


MODEL	-	SIZE/ARRAY	-	WATTS	-	CRI/CCT	-	VOLTAGE	-	DIMMING	-	PHOTOCELL	-	FINISH
	-		-		-	8CCT3	-	UNV	-		-		-	

EXAMPLE PART NUMBER: CWSP3S/10W/8CCT3/UNV/PC/BK

ACCESSORIES


ORDER	ORDER CODE	ITEM #	DESCRIPTION	LENGTH
	11421	CSMPENACC-BK	Pendant Accessory Black	33-1/2" / 850mm
	11422	CSMPENACC-BZ	Pendant Accessory Bronze	33-1/2" / 850mm

PRODUCT DIMENSIONS

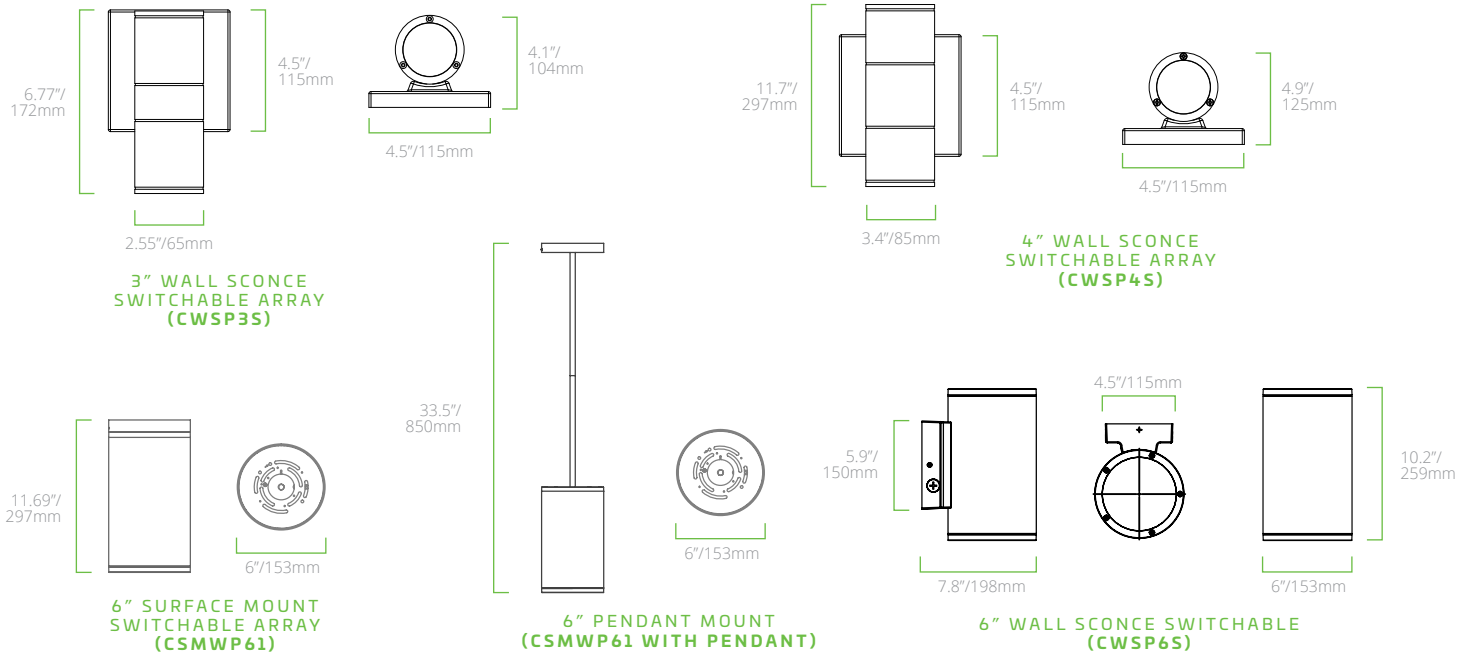


PHOTOMETRIC INFORMATION - CSMWP61/30W/8WCCT3/UNV/DIM

POLAR CANDELA DISTRIBUTION

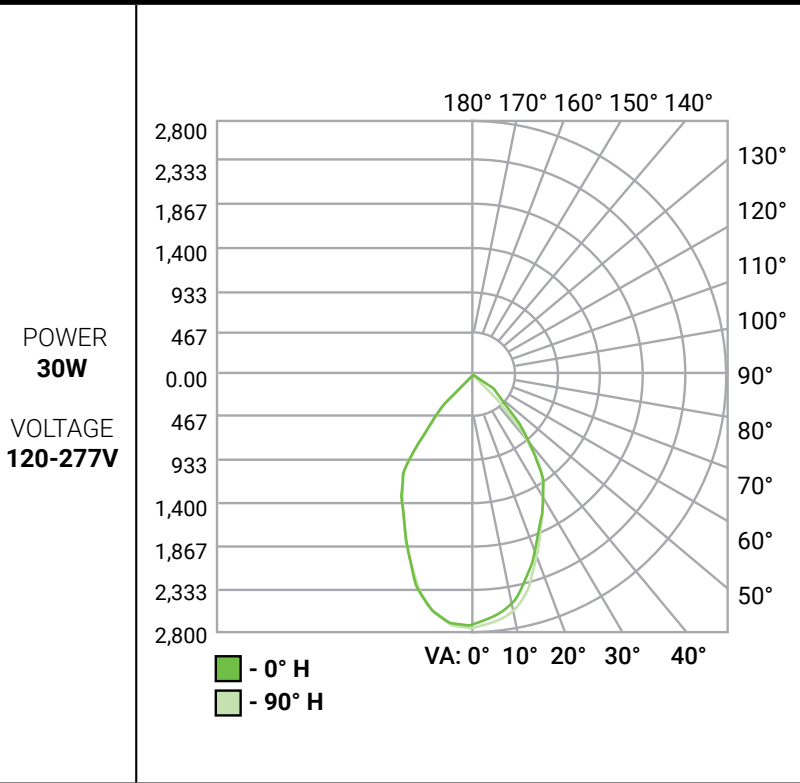


ILLUMINANCE AT A DISTANCE

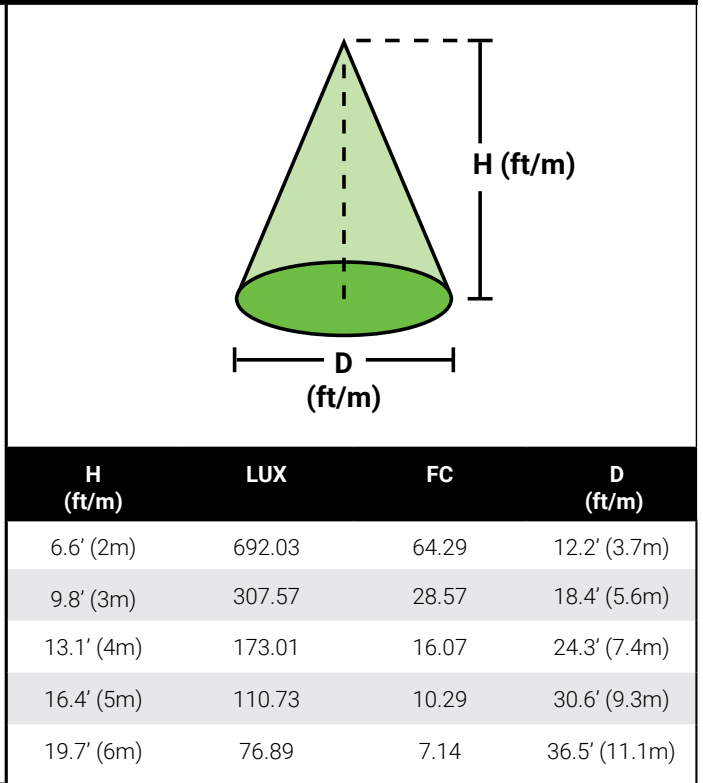


*Based on operation at 4000K & 120V.

PHOTOMETRIC INFORMATION - CWSP3S/PS10/8CCT3/UNV/PC

POLAR CANDELA DISTRIBUTION

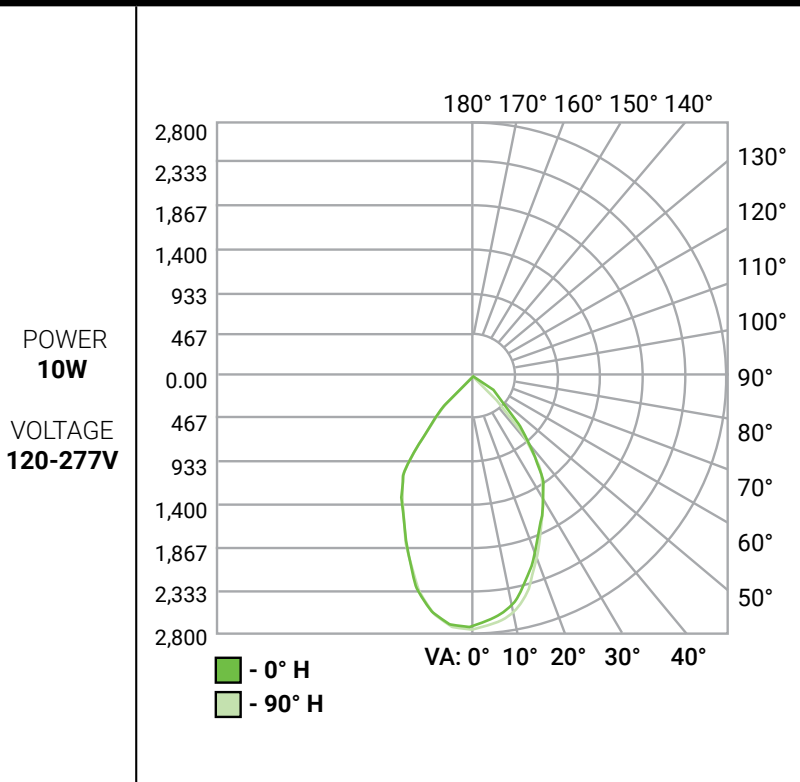


ILLUMINANCE AT A DISTANCE

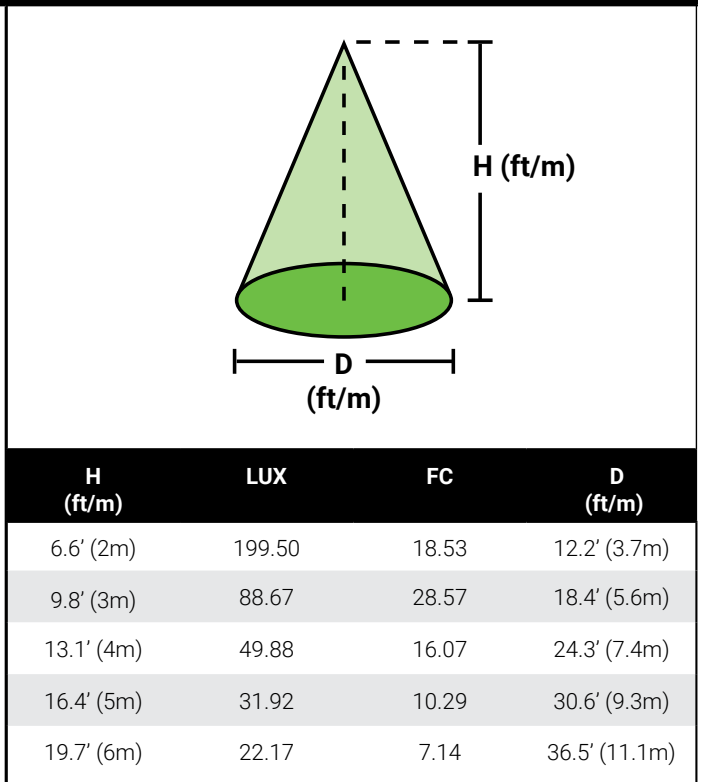

*Based on operation at 4000K & 120V.


PHOTOMETRIC INFORMATION - CWSP4S/PS20/8CCT3/UNV/PC

POLAR CANDELA DISTRIBUTION

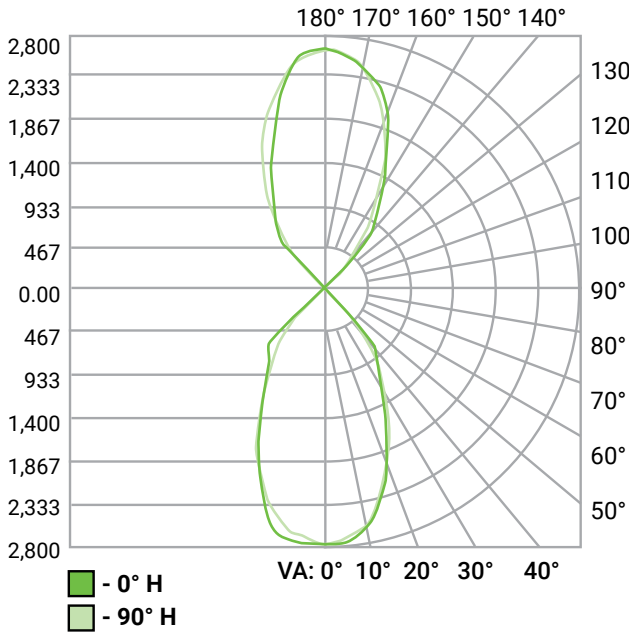

POWER
20W
VOLTAGE
120-277V

ILLUMINANCE AT A DISTANCE

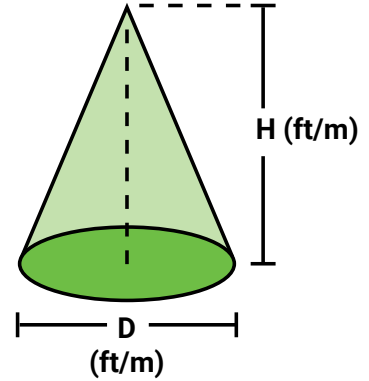


H (ft/m)	LUX	FC	D (ft/m)
6.6' (2m)	242.31	22.51	12.2' (3.7m)
9.8' (3m)	107.60	10.00	18.4' (5.6m)
13.1' (4m)	60.58	5.63	24.3' (7.4m)
16.4' (5m)	38.77	3.60	30.6' (9.3m)
19.7' (6m)	26.92	2.50	36.5' (11.1m)

*Based on operation at 4000K & 120V. Illumination at a distance, for downlight portion only.


PHOTOMETRIC INFORMATION - CWSP6S/36W/8CCT3/UNV/PC

POLAR CANDELA DISTRIBUTION

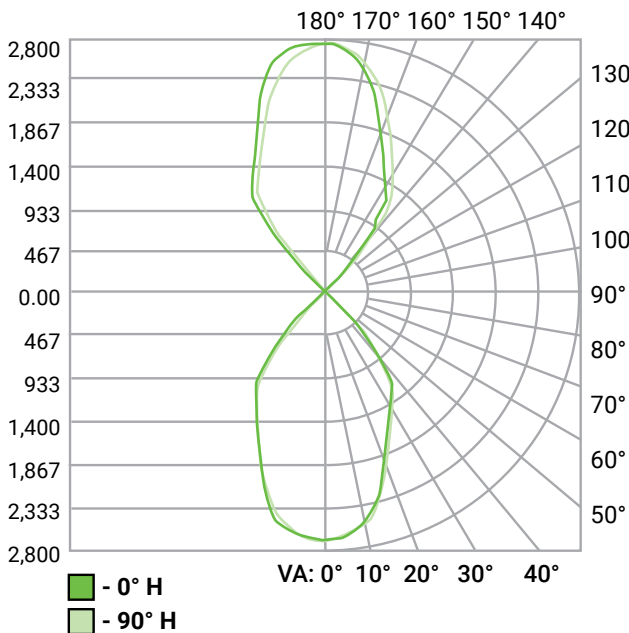

POWER
36W
VOLTAGE
120-277V

ILLUMINANCE AT A DISTANCE

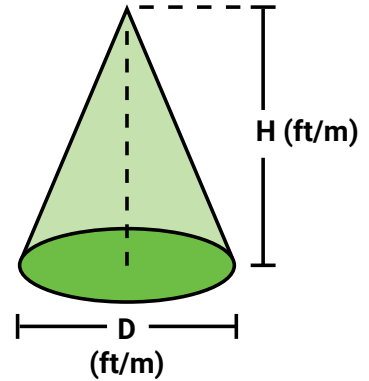

H (ft/m)	LUX	FC	D (ft/m)
6.6' (2m)	463.15	43.03	12.2' (3.7m)
9.8' (3m)	205.81	19.12	18.4' (5.6m)
13.1' (4m)	115.79	10.76	24.3' (7.4m)
16.4' (5m)	74.10	6.88	30.6' (9.3m)
19.7' (6m)	51.46	4.78	36.5' (11.1m)

*Based on operation at 4000K & 120V.