



TWP1 Traditional Wall Pack

HIGHLIGHTS

- Traditional style matches the appearance of legacy products while also covering the same footprint
- 4 - 1/2" knockouts makes for versatile mounting
- Wall mount with or without junction box
- Integrated photocell for dusk to dawn operation
- Hinged removable door housing makes installation easier
- Glass lens
- PowerSet feature allows for multiple lumen stops out of the box
- FieldCCeT features provides multiple color temperature settings in one fixture

CERTIFICATIONS

- UL Listed for US & Canada
- RoHS compliant
- FCC compliant
- ICES-005 compliant
- IP65 Rated
- IK Pending
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- High efficacy, up to 135 lm/W
- Available in PowerSet model: power-selectable 45/35/25W; 80/70/60W; 120/105/90W
- Available in single CCT models: 4000 or 5000K or FieldCCeT models: field-selectable CCT 30/40/5000K
- CRI: >80
- Rated Life: >54,000 hours

ELECTRICAL

- Input voltage: 120-277V, 120-347V, 277-480V
- 0-10V dimming, dim-to-off
- Surge protection: 4kV
- Power factor: >0.9
- THD: <20%

THERMAL

- -40°F to 122°F (-40°C to 50°C) ambient operating temperature
- -13°F to 122°F (-25°C to 50°C) ambient operating temperature with photocell

CONSTRUCTION

- Bronze powder coated, die-cast aluminum housing
- Glass lens

DIMMING

- For dimming compatibility visit eiko.com

WARRANTY

- 5-Year limited warranty available online. Contact your Eiko sales rep for additional details.

KEY FEATURES

TRADITIONAL STYLE

Matches the appearance of legacy products

INTEGRATED PHOTOCELL

Manage security and safety with the integrated photocell; it can easily be disabled in the field

INSTALLATION MADE EASY

4 - 1/2" knockouts, hinged door housing, can be mounted with or without junction box



| | |
|----------------|---------|
| project name | type |
| catalog number | voltage |
| approved by | date |



APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security
- Perimeter Lighting

AVAILABLE MODELS

| ORDER | ORDER CODE | ITEM # | WATTS* | CCT** | LUMENS | EFFICACY (lm/W) | VOLTAGE | TRADITIONAL WATTAGE EQUIVALENT | DLC ID # |
|-------|------------|-------------------|-------------|-----------------|-------------------------|-----------------|----------|--------------------------------|----------|
| | | | | | | | | | PREMIUM |
| | 13651 | TWP1-PS45-40-U | 45/35/25W | 4000K | 6075/4725/3375 lm | 135 lm/W | 120-277V | Up to 100W HID | S-GNSMQI |
| | 13653 | TWP1-PS45-50-U | 45/35/25W | 5000K | 6075/4725/3375 lm | 135 lm/W | 120-277V | Up to 100W HID | S-XVPLKT |
| | 13654 | TWP1-PS45-FCCT-U | 45/35/25W | 3000/4000/5000K | 6075/4725/3375 lm | 135 lm/W | 120-277V | Up to 100W HID | S-GIEKB1 |
| | 13656 | TWP1-PS45-FCCT-H | 45/35/25W | 3000/4000/5000K | 6075/4725/3375 lm | 135 lm/W | 120-347V | Up to 100W HID | S-NPQ9IH |
| | 13667 | TWP1-PS45-FCCT-V | 45/35/25W | 3000/4000/5000K | 6075/4725/3375 lm | 135 lm/W | 277-480V | Up to 100W HID | S-VGQ0EP |
| | 13657 | TWP1-PS80-40-U | 80/70/60W | 4000K | 10,800/9450/8100 lm | 135 lm/W | 120-277V | Up to 250W HID | S-1AY8SC |
| | 13659 | TWP1-PS80-50-U | 80/70/60W | 5000K | 10,800/9450/8100 lm | 135 lm/W | 120-277V | Up to 250W HID | S-SL830E |
| | 13658 | TWP1-PS80-40-H | 80/70/60W | 5000K | 10,800/9450/8100 lm | 135 lm/W | 120-347V | Up to 250W HID | S-AQLWST |
| | 13660 | TWP1-PS80-FCCT-U | 80/70/60W | 3000/4000/5000K | 10,800/9450/8100 lm | 135 lm/W | 120-277V | Up to 250W HID | S-YJKD61 |
| | 13662 | TWP1-PS80-FCCT-H | 80/70/60W | 3000/4000/5000K | 10,800/9450/8100 lm | 135 lm/W | 120-347V | Up to 250W HID | S-H54MS2 |
| | 13661 | TWP1-PS80-FCCT-V | 80/70/60W | 3000/4000/5000K | 10,800/9450/8100 lm | 135 lm/W | 277-480V | Up to 250W HID | S-SFYLEU |
| | 13663 | TWP1-PS120-40-U | 120/105/90W | 4000K | 16,200/14,175/12,150 lm | 135 lm/W | 120-277V | Up to 400W HID | S-M163GK |
| | 13665 | TWP1-PS120-50-U | 120/105/90W | 5000K | 16,200/14,175/12,150 lm | 135 lm/W | 120-277V | Up to 400W HID | S-G4CMLB |
| | 13666 | TWP1-PS120-FCCT-U | 120/105/90W | 3000/4000/5000K | 16,200/14,175/12,150 lm | 135 lm/W | 120-277V | Up to 400W HID | S-V8SK5D |
| | 13668 | TWP1-PS120-FCCT-H | 120/105/90W | 3000/4000/5000K | 16,200/14,175/12,150 lm | 135 lm/W | 120-347V | Up to 400W HID | S-B65CGK |
| | 13667 | TWP1-PS120-FCCT-V | 120/105/90W | 3000/4000/5000K | 16,200/14,175/12,150 lm | 135 lm/W | 277-480V | Up to 400W HID | S-DB2EW6 |

* All power-selectable fixtures ship at the highest wattage setting


** All CCT-selectable fixtures ship at 5000K

MODEL CONFIGURATOR

| MODEL | - | WATTAGE | - | CCT | - | VOLTAGE |
|-------|---|---------|---|-----|---|---------|
| TWP1 | - | | - | | - | |

EXAMPLE PART NUMBER: TWP1-PS45-FCCT-U

PRODUCT DIMENSIONS

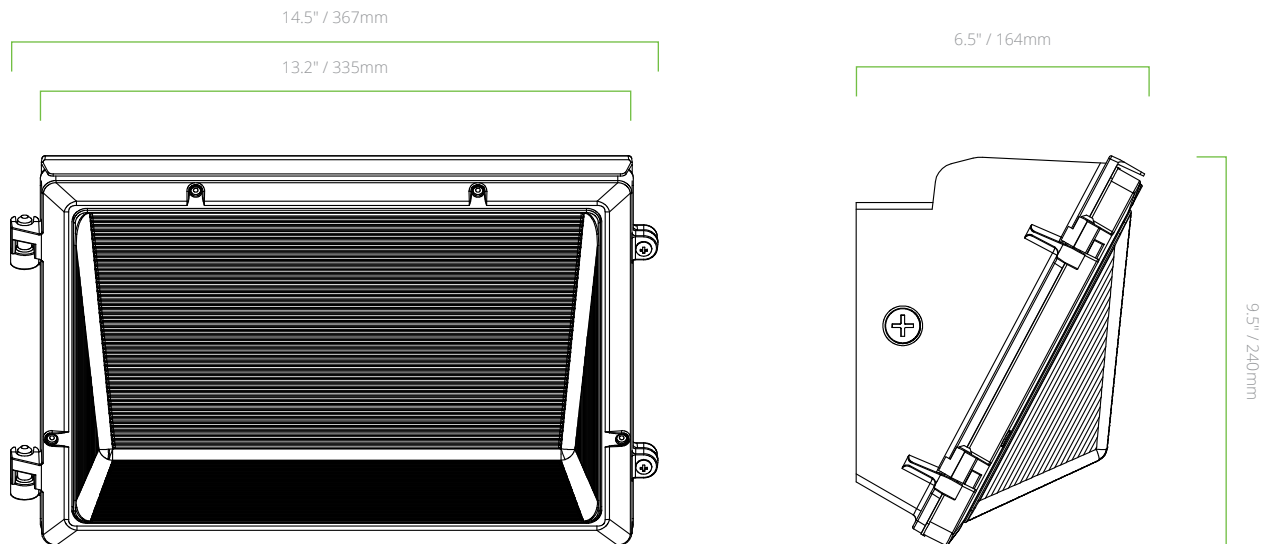

TWP1-ALL MODELS

7.8 lbs/3.5 kg