



## TWP1 Traditional Wall Pack

### HIGHLIGHTS

- Traditional style matches the appearance of legacy products while also covering the same footprint
- 4 - 1/2" knockouts makes for versatile mounting
- Wall mount with or without junction box
- Integrated photocell for dusk to dawn operation
- Hinged removable door housing makes installation easier
- Glass lens
- PowerSet feature allows for multiple lumen steps out of the box
- FieldCCeT features provides multiple color temperature settings in one fixture

### CERTIFICATIONS

- UL Listed for US & Canada
- RoHS compliant
- FCC compliant
- ICES-005 compliant
- IP65 Rated
- IK Pending
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

### PERFORMANCE

- High efficacy, up to 135 lm/W
- Available in PowerSet model: power-selectable 45/35/25W; 80/70/60W; 120/105/90W
- Available in single CCT models: 4000 or 5000K or FieldCCeT models: field-selectable CCT 30/40/5000K
- CRI: >80
- Rated Life: >54,000 hours

### ELECTRICAL

- Input voltage: 120-277V, 120-347V, 277-480V
- 0-10V dimming, dim-to-off
- Surge protection: 4kV
- Power factor: >0.9
- THD: <20%

### THERMAL

- -40°F to 122°F (-40°C to 50°C) ambient operating temperature
- -13°F to 122°F (-25°C to 50°C) ambient operating temperature with photocell

### CONSTRUCTION

- Bronze powder coated, die-cast aluminum housing
- Glass lens

### DIMMING

- For dimming compatibility visit [eiko.com](http://eiko.com)

### WARRANTY

- 5-Year limited warranty available [online](http://online). Contact your Eiko sales rep for additional details.

## KEY FEATURES

### TRADITIONAL STYLE

Matches the appearance of legacy products

### INTEGRATED PHOTOCELL

Manage security and safety with the integrated photocell; it can easily be disabled in the field

### INSTALLATION MADE EASY

4 - 1/2" knockouts, hinged door housing, can be mounted with or without junction box



project name	type
catalog number	voltage
approved by	date



### APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security
- Perimeter Lighting

## AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	WATTS*	CCT**	LUMENS	EFFICACY (lm/W)	VOLTAGE	TRADITIONAL WATTAGE EQUIVALENT	DLC ID #
									PREMIUM
	13651	TWP1-PS45-40-U	45/35/25W	4000K	6075/4725/3375 lm	135 lm/W	120-277V	Up to 100W HID	S-GNSMQI
	13653	TWP1-PS45-50-U	45/35/25W	5000K	6075/4725/3375 lm	135 lm/W	120-277V	Up to 100W HID	S-XVPLKT
	13654	TWP1-PS45-FCCT-U	45/35/25W	3000/4000/5000K	6075/4725/3375 lm	135 lm/W	120-277V	Up to 100W HID	S-GIEKB1
	13656	TWP1-PS45-FCCT-H	45/35/25W	3000/4000/5000K	6075/4725/3375 lm	135 lm/W	120-347V	Up to 100W HID	S-NPQ9IH
	13667	TWP1-PS45-FCCT-V	45/35/25W	3000/4000/5000K	6075/4725/3375 lm	135 lm/W	277-480V	Up to 100W HID	S-VGQ0EP
	13657	TWP1-PS80-40-U	80/70/60W	4000K	10,800/9450/8100 lm	135 lm/W	120-277V	Up to 250W HID	S-1AY8SC
	13659	TWP1-PS80-50-U	80/70/60W	5000K	10,800/9450/8100 lm	135 lm/W	120-277V	Up to 250W HID	S-SL830E
	13658	TWP1-PS80-40-H	80/70/60W	5000K	10,800/9450/8100 lm	135 lm/W	120-347V	Up to 250W HID	S-AQLWST
	13660	TWP1-PS80-FCCT-U	80/70/60W	3000/4000/5000K	10,800/9450/8100 lm	135 lm/W	120-277V	Up to 250W HID	S-YJKD61
	13662	TWP1-PS80-FCCT-H	80/70/60W	3000/4000/5000K	10,800/9450/8100 lm	135 lm/W	120-347V	Up to 250W HID	S-H54MS2
	13661	TWP1-PS80-FCCT-V	80/70/60W	3000/4000/5000K	10,800/9450/8100 lm	135 lm/W	277-480V	Up to 250W HID	S-SFYLEU
	13663	TWP1-PS120-40-U	120/105/90W	4000K	16,200/14,175/12,150 lm	135 lm/W	120-277V	Up to 400W HID	S-M163GK
	13665	TWP1-PS120-50-U	120/105/90W	5000K	16,200/14,175/12,150 lm	135 lm/W	120-277V	Up to 400W HID	S-G4CMLB
	13666	TWP1-PS120-FCCT-U	120/105/90W	3000/4000/5000K	16,200/14,175/12,150 lm	135 lm/W	120-277V	Up to 400W HID	S-V8SK5D
	13668	TWP1-PS120-FCCT-H	120/105/90W	3000/4000/5000K	16,200/14,175/12,150 lm	135 lm/W	120-347V	Up to 400W HID	S-B65CGK
	13667	TWP1-PS120-FCCT-V	120/105/90W	3000/4000/5000K	16,200/14,175/12,150 lm	135 lm/W	277-480V	Up to 400W HID	S-DB2EW6

\* All power-selectable fixtures ship at the highest wattage setting

\*\* All CCT-selectable fixtures ship at 5000K


MODEL CONFIGURATOR						
MODEL	-	WATTAGE	-	CCT	-	VOLTAGE
TWP1	-		-		-	

EXAMPLE PART NUMBER: TWP1-PS45-FCCT-U

## BATTERY BACKUPS

ORDER	ORDER CODE	ITEM #	DESCRIPTION
	14654	EEBN08WHB300	EIKO Emergency Battery Kit Internal 8W, 120-347VAC 50-300VDC, High Temp 140°F, CEC Compliant. Field install only. See spec sheet for full details.

## PRODUCT DIMENSIONS

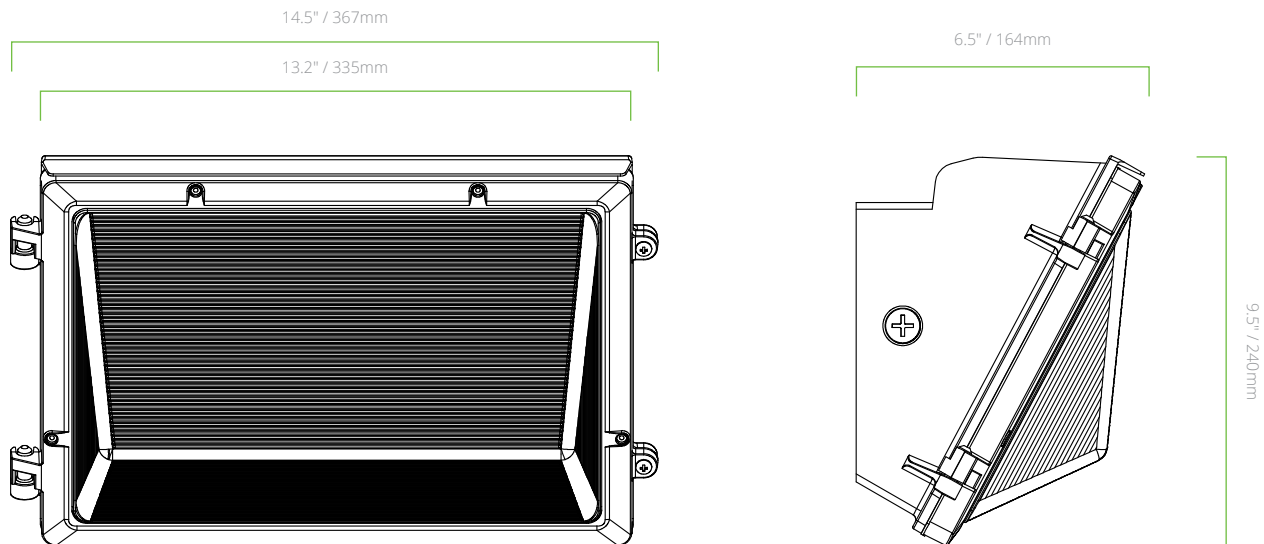

### TWP1-ALL MODELS

7.8 lbs/3.5 kg