



DWR Downlight Wafer Remote

HIGHLIGHTS

- Easily installs into drywall or suspended ceilings
- Includes remote driver/junction box
- Canless design
- Available in 3 sizes; 4", 6", 8"
- FieldCCeT features provides multiple color temperature settings in one fixture

CERTIFICATIONS

- ETL Listed for US & Canada
- RoHS Compliant
- IC Rated
- Wet Location Rated
- ENERGY STAR® Approved for superior energy efficiency
- 90 CRI models: Supports compliance with Title 24 (JAB)

PERFORMANCE

- High Efficacy, up to 90 lm/W
- Available in fixed wattage models: 13W, 16W or 20W
- Available in single CCT models: 3000K or FieldCCeT models: field-selectable CCT 27/30/35/40/5000K
- CRI: >80; >90
- Estimated lifetime: L70: >50,000 hours

ELECTRICAL

- Input voltage: 120V
- Triac dimming to 10%
- Power Factor: >0.9
- THD: <20%

THERMAL

- -4°F to 104°F (-20°C to 40°C) operating temperature

CONSTRUCTION

- Powder coated, die-cast aluminum housing
- Frosted lens for diffuse lighting

WARRANTY

- 5-Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

project name	type
catalog number	voltage
approved by	date



APPLICATIONS

- Healthcare
- Hospitality
- Office
- Property Management
- Residential
- Retail

AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	SIZE	WATTS	CCT	LUMENS	EFFICACY (lm/W)	CRI	VOLTAGE	DIMMING	J24 JAB
	12132	DWR4/13W/830/120DT	4"	13W	3000K	800 lm	62 lm/W	80	120V	Triac	
	12135	DWR4/13W/9CCT5/120DT	4"	13W	27/30/35/40/5000K	800 lm	90 lm/W	90	120V	Triac	✓
	12133	DWR6/16W/830/120DT	6"	16W	3000K	1200 lm	75 lm/W	80	120V	Triac	
	12136	DWR6/16W/9CCT5/120DT	6"	16W	27/30/35/40/5000K	1200 lm	90 lm/W	90	120V	Triac	✓
	12134	DWR8/20W/830/120DT	8"	20W	3000K	1600 lm	80 lm/W	80	120V	Triac	
	12137	DWR8/20W/9CCT5/120DT	8"	20W	27/30/35/40/5000K	1600 lm	90 lm/W	90	120V	Triac	✓

MODEL CONFIGURATOR									
MODEL	SIZE	-	WATTS	-	CCT	-	VOLTAGE		
DWR		-		-		-			




EXAMPLE PART NUMBER: DWR8/20W/830/120DT

BATTERY BACKUP


ORDER	ORDER CODE	ITEM #	DESCRIPTION
	13574	EEBE40WHA170S	EiKO Emergency Battery External 40W 100-347VAC 170VDC Linear Single Flex-Conduit CEC Compliant
	11675	EEBE18WHA170S*	EiKO Emergency Battery External 18W 120-347V 170VDC Linear Single Flex-Conduit CEC Compliant

* NOTE: Only available on DWR4/13W and DWR6/16W. Field install only.



PRODUCT DIMENSIONS

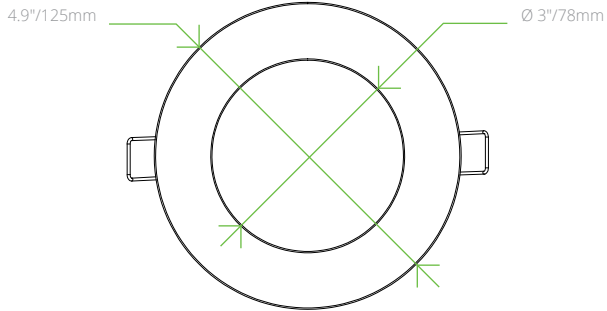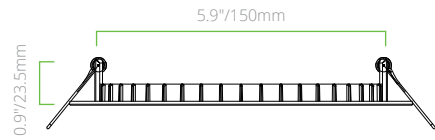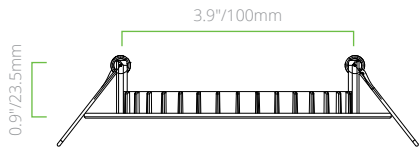

DWR4

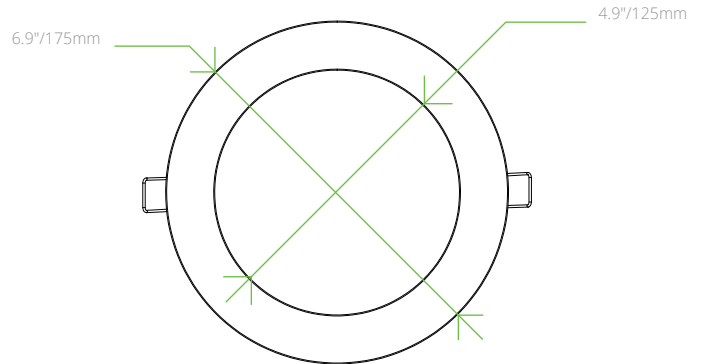

DWR6

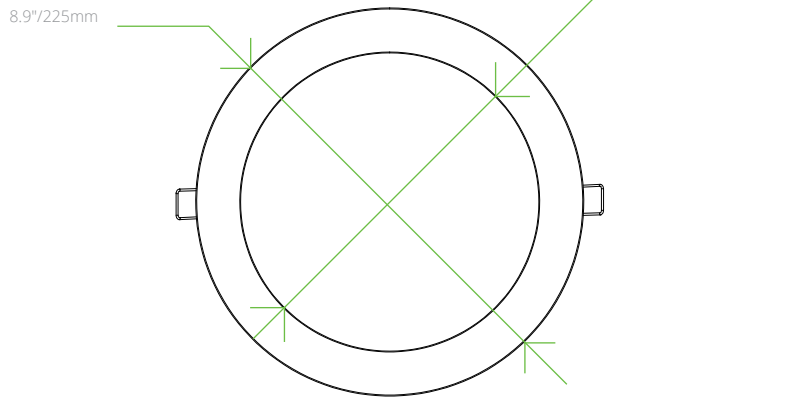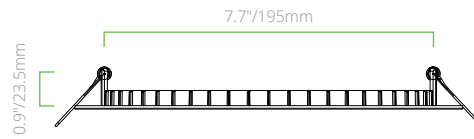

DWR8