



project name	type
catalog number	voltage
approved by	date

LH1 PRO LINEAR HIGH BAY

The LH1 Pro fixture is the smart choice for reliable, high-performance lighting. Engineered for superior light distribution, it delivers even illumination with precise beam control. Its advanced optics provide a 90° wide beam distribution to light up large areas effectively, while an optional 65° lens is perfect for warehouse aisle lighting. Featuring 6 Power and Color select SKUs and 4 fixed Power and CCT SKUs, the LH1 Pro excels in demanding spaces.



FEATURES AND BENEFITS

PERFORMANCE

- 6 Power & Color Select SKUs for simplified inventory management and field customization.
 - PowerSET – 4 Power settings
 - FieldCCeT – 2 CCT settings (4000/5000K)
- 4 fixed Power and CCT SKUs for cost-conscious projects.
- Full spectrum input voltage coverage: 120-277V, 120-347V and 277-480V options
- Wide range of lumen packages (13,500 – 66,000 lumens) provide solutions for mounting heights up to 60'.
- Diffused polycarbonate lens for reduced glare (beam angle 90°).
- Aisle lens optics option ideal for warehouse aisles (beam angle 65°)
- Die cast aluminum housing and impact resistant lens for robust and reliable installation.
- Technical performance:
 - CRI >80
 - Efficacy up to 150 LPW
 - Lumen Maintenance 70% (L70) at > 100,000Hrs
 - THD <20%, Power Factor >0.9
 - Surge Protection: 6kV included
 - All products are DesignLights Consortium® (DLC) Premium listed.

INSTALLATION

- Accessories included in the box:
 - 10/600V rated power cord for 120-347V models
 - 6.5' aircraft cable with V hooks
- Multiple mounting options available:
 - V Hook & Chain
 - Threaded Rod & Surface Mount
 - Pendant Mount
- Available wire guard options in each size for added security.

CONTROLS

- Standard 0-10V dimming with Dim-to-Off.
- Controls Ready design for standalone and networked control options.
 - Ships with controls ready receptacle for field installation.
 - EiKO Plug-and-Play sensors and controls available.
 - 3rd Party network control options through factory customizations.

CUSTOMIZATION

- Factory installed options to meet custom requirements and building codes:
 - 65° aisle lens optics
 - 90-minute emergency lighting
 - 10kV/20kV surge protection
 - 3rd party networked controls
 - Custom cord lengths and plugs

APPLICATIONS

- Warehouses
- Distribution Centers
- Grocery Stores
- Gymnasiums
- Data Centers
- Manufacturing Plants
- Cold Storage
- Big Box Retail
- Indoor Recreational Facilities
- Vehicle Maintenance Facilities

AVAILABLE MODELS

ORDER CODE	MODEL	DLC PRODUCT ID	DLC CLASSIFICATION
STATIC POWER & COLOR MODELS			
13408	LH1-130-50-U	S-JKLP3W	Premium
13422	LH1-160-50-U	S-D7N8KC	Premium
13424	LH1-160-50-V	S-8RVEPX	Premium
13428	LH1-200-50-U	S-AXHMF3	Premium
POWER & COLOR SELECTABLE MODELS			
14980	LH1-PS160-FCCT-H	S-AWCZVT	Premium
14981	LH1-PS240-FCCT-H	S-6CGSFV	Premium
15642	LH1-PS320-FCCT-H	Pending	Premium
15643	LH1-PS320-FCCT-V	Pending	Premium
15644	LH1-PS440-FCCT-H	Pending	Premium
15645	LH1-PS440-FCCT-V	Pending	Premium

All fixtures ship at the highest wattage setting and at 5000K CCT.

AVAILABLE MODELS








ORDER	ORDER CODE	MODEL	WATTS (W)	COLOR TEMPERATURE (CCT)	LUMEN OUTPUT (lm)	INPUT VOLTAGE (VAC)	SIZE
120-277V							
	13408	LH1-130-50-U	130W	5000K	13,500 lm	120-277V	23" x 11"
	13422	LH1-160-50-U	160W	5000K	24,000 lm	120-277V	23" x 11"
	13428	LH1-200-50-U	200W	5000K	30,000 lm	120-277V	23" x 11"
120-347V							
	14980	LH1-PS160-FCCT-H	160/130/110/90W	4000/5000K	24,000/19,500/16,500/13,500 lm	120-347V	23" x 11"
	14981	LH1-PS240-FCCT-H	240/220/200/180W	4000/5000K	36,000/33,000/30,000/27,000 lm	120-347V	23" x 11"
	15642	LH1-PS320-FCCT-H	320/300/280/260W	4000/5000K	48,000/45,000/42,000/39,000 lm	120-347V	23" x 12.5"
	15644	LH1-PS440-FCCT-H	440/400/380/360W	4000/5000K	66,000/60,000/57,000/54,000 lm	120-347V	29.5" x 14.3"
277-480V							
	13424	LH1-160-50-V	160W	5000K	24,000 lm	277-480V	23" x 11"
	15643	LH1-PS320-FCCT-V	320/300/280/260W	4000/5000K	48,000/45,000/42,000/39,000 lm	277-480V	23" x 12.5"
	15645	LH1-PS440-FCCT-V	440/400/380/360W	4000/5000K	66,000/60,000/57,000/54,000 lm	277-480V	29.5" x 14.3"

ORDERING GUIDE

MODEL CONFIGURATOR				FACTORY INSTALLED OPTIONS				
MODEL	WATTS	COLOR TEMPERATURE	INPUT VOLTAGE	LENS	CORD LENGTH	CORD END	SURGE PROTECTION	EMERGENCY OPTIONS
LH1								
LH1	PS - Power Selectable 130 - 130W 160 - 160W 200 - 200W 240 - 240W 320 - 320W 440 - 440W	50 - 5000K FCCT - Field Color Selectable (4000K/5000K)	U - 120-277V H - 120-347V V - 277-480V	[Blank] - Default, 90 degree lens 65L - 65 degree aisle lens (Not DLC Listed)	[Blank] - Default, no length* W1xx - 300V 18/3 white cord W2xx - 600V 18/3 white cord W3xx - 600V 18/6 white cord with dimming wires and a 24/7 hot wire for battery backup (Cord end option is not available) *all 120-347V Models come with 10' External Cord	[Blank] - Default, no cord end N01 - 125V 15A straight plug 5-15P N04 - 125V 15A locking plug L5-15P N06 - 277V 15A locking plug L7-15P N12 - 277V 20A locking plug L7-20P N13 - 347V 20A locking plug L24-20P N14 - 480V 20A locking plug L8-20P	[Blank] - Default, no additional protection SP10U - 10kV surge protection 120-277V SP10V - 10kV surge protection 277-488V SP20U - 20kV surge protection 120-277V SP20V - 20kV surge protection 277-480V	[Blank] - Default, no Emergency option EB18* - 18W Emergency Battery pack, CEC, 120-347V EB40H - 40W Emergency Battery pack, CEC, 120-347V EB40V - 40W Emergency Battery pack CEC, 277-480V *for 130W Model only

EXAMPLE PART NUMBER: LH1-PS160-FCCT-H-65L-W310-SP20V-EB40H

MOUNTING SYSTEMS

ORDER	ORDER CODE	ITEM #	DESCRIPTION	IMAGES
			Included V-Hooks & 6.5' Aircraft cable	
	13815	LH1-VCK	V-Hook & Chain Kit.	 
	13816	LH1-PMK*	Pendant Mount Kit.	 
	13817	LH1-TRSMK	Threaded Rod & Surface Mount Kit.	 

* Pendant mount kit is not compatible with battery backups.

WIRE GUARDS

ORDER	ORDER CODE	ITEM #	DESCRIPTION	IMAGES
	13818	LH1-WG	LH1 Wire Guard for 90-240W.	
	13819	LH1-WG-L	LH1 Wire Guard for 320W.	
	13820	LH1-WG-XL	LH1 Wire Guard for 440W.	

OPTICAL LENS ACCESSORIES

ORDER	ORDER CODE	ITEM #	DESCRIPTION	IMAGES
	14369	LH1-LENS-65	LH1 Aisle Lens, 65 Degree, for 90-240W. (Field or factory install)	
	14371	LH1-LENS-65-L	LH1 Aisle Lens, 65 Degree, for 320W. (Field or factory install)	
	14372	LH1-LENS-65-XL	LH1 Aisle Lens, 65 Degree, for 440W. (Field or factory install)	

* Pendant mount kit is not compatible with battery backups.

Field optics swap in seconds: snap the standard 90° wide beam lens using a flat screw driver. Slide it out and replace with 65° aisle lens.

EMERGENCY LIGHTING SOLUTIONS

ORDER	ORDER CODE	ITEM #	DESCRIPTION	IMAGES	FACTORY INSTALLED CODE
	11675	EEBE18WHA170S* View spec sheet	EiKO 18W - 120-347V Emergency battery pack for use with LH1 130W fixture. Single Flex- Conduit CEC Compliant. See spec sheet for full details.		EB18
	13574	EEBE40WHA170S* View spec sheets	EiKO 40W - 120-347V Emergency battery pack for use with LH1 fixtures. Single Flex- Conduit CEC Compliant. See spec sheet for full details. In EM mode only half of the 320W and 440W fixture will power up. The resulting light output is equivalent to a 40W output.		EB40H
	13571	EEBE40WVA500* View spec sheets	EiKO 40W - 277-480V Emergency battery pack for use with LH1 fixtures. Single Flex- Conduit CEC Compliant. See spec sheet for full details. In EM mode only half of the 320W and 440W fixture will power up. The resulting light output is equivalent to a 40W output.		EB40V
	14383	LH1-ZBRK	Bracket for mounting EiKO emergency battery packs directly to the fixture.		

*** WARNING:** When using these AC version battery packs with any controls solution, internal rewiring is required according to the installation sheets' wiring diagram. Failure to do so may result in a violation of safety codes.

Please check the light levels on the ground through a lighting layout to ensure it meets egress lighting requirements.

FLUORESCENT & HID REPLACEMENTS GUIDE

FLUORESCENT	HID	LHS1 WATTS	LUMEN OUTPUT (lm)	INPUT VOLTAGE	MODEL
2xT5HO, 4xT8	175W MH	130W	13,500 lm	120-277V	LH1-130-50-U
4xT5HO, 6xT8	400W MH	160/130/110/90W	24,000 lm	120-277V	LH1-160-50-U
			24,000 lm	277-480V	LH1-160-50-V
			24,000/19,500/16,500/13,500 lm	120-347V	LH1-PS160-FCCT-H
10xT8	450W PS	200/180/160/140W	30,000 lm	120-277V	LH1-200-50-U
8 xT5HO	750W MH	240/220/200/180W	36,000/33,000/30,000/27,000 lm	120-347V	LH1-PS240-FCCT-H
10xT5HO	1000W MH	320/300/280/260W	48,000/45,000/42,000/39,000 lm	120-347V	LH1-PS320-FCCT-H
				277-480V	LH1-PS320-FCCT-V
12 xT5 HO		440/400/380/360W	66,000/60,000/57,000/54,000 lm	120-347V	LH1-PS440-FCCT-H
				277-480V	LH1-PS440-FCCT-V



CONTROLS READY

STANDALONE LIGHT & MOTION SENSORS

Field-installable, screw-in, plug-and-play sensors transform EiKO controls ready fixtures into smart lighting devices which respond to the environment and save time, cost and energy consumption, in applications up to 40ft.

Configure EiKO standalone sensor settings using the sensor commissioning tool to achieve desired behavior and enable advanced light control functions, such as Daylight Harvesting and Dusk-to-Dawn dimming.



PIR: SEN5A-SPPR-WH

Recommended use:

- Applications with stable operating temperatures
- Direct line of sight and accurate positioning
- Away from direct sunlight or rapidly changing temperature sources like, HVAC vents.

[View spec sheets for complete product information.](#)



MICROWAVE: SEN5A-SPMR-WH

Recommended use:

- Low Temp applications (i.e commercial freezers)
- Install on fixed mounted fixtures (not recommended for suspended fixtures)
- Away from motor objects like fans & machinery

[View spec sheets for complete product information.](#)

ORDER	ORDER CODE	MODEL	DESCRIPTION	IMAGE
	13861	SEN5A-SPPR-WH	Standalone Screw-in PIR Motion Sensor	
	13859	SEN5A-SPMR-WH	Standalone Screw-in Microwave Motion Sensor	
SEN5A COMMISSIONING TOOL				
	13344	SEN5A-ACT	Commissioning Tool for SEN5A	

EiKO Standalone sensors come with default settings below:

- Brightness: 100%
- Sensitivity: 75%
- Hold Time: 10 minutes
- Daylight Function: Disable
- Dim level: 30%
- Dim Time: 1 minute

BLUETOOTH NETWORKED SENSOR

EiKO's field-installable screw-in Bluetooth (BLE) enabled PIR sensor brings network control capabilities to EiKO Controls Ready fixtures.

Use the Silvair Commissioning app to set up and configure the sensor settings and your lighting network.

Pair multiple SENA-WPPR-WH enabled fixtures to create zone and group level control. Add compatible wall stations or switches to complete your desired control plan and advanced control strategies all through the Silvair App.

No hubs, routers, gateways required.



PIR : SENA-WPPA-WH

[View spec sheets for complete product information.](#)

Powered by:
SILVAIR




Web App: platform.silvair.com




ORDER	ORDER CODE	MODEL	DESCRIPTION	IMAGE
	13865	SENA-WPPA-WH	Bluetooth (BLE) Screw-in PIR Motion sensor	
SELF-POWERED WIRELESS WALL SWITCHES				
	12654	ESRPB-W-EO	Single - Bluetooth self-powered kinetic rocker switch White, Wall plate included	
	12655	EDRPB-W-EO	Double - Bluetooth self-powered kinetic rocker switch White, Wall plate included	
WIRELESS 120-277V WALL CONTROLLERS				
	12635	PSC-DM-WS-100-BLE-SR	Bluetooth Single Gang Single Button Wall Controller, 120-277V White, Parameters set by Silvair App.	
	12636	PSC-DM-I-WS-100-BLE-SR	Bluetooth PIR Occupancy/ Vacancy Sensor, 120-277V, Single Gang Wall Controller, White, Parameters set by Silvair App.	
	12637	PSC-DM-WS-400-BLE-SR	Bluetooth 4-Button Wall Controller, 120-277V, Single Gang, White, Parameters set by Silvair App.	

1 Remove 1/2" knockout plug on front plate of fixture.

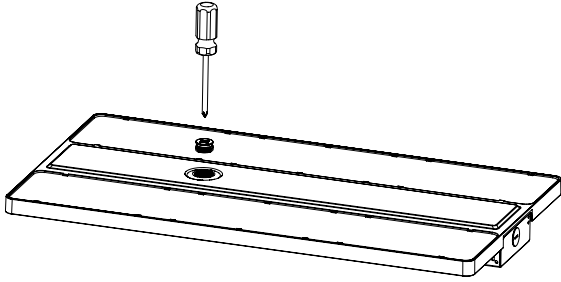

2 Screw sensor in place until tight.

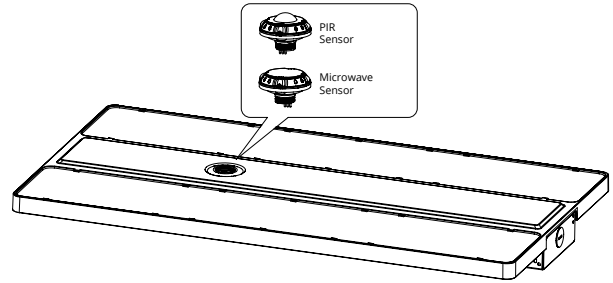


STANDALONE VS NETWORKED CONTROL


FEATURE	STANDALONE CONTROLS	NETWORKED CONTROLS
Operation	Independent	Zone/Group
Commissioning Method	Remote Control (optional)	App (required)
Daylight Harvesting	✓	✓
Sensitivity Adjustment	✓	✓
Time Delay	✓	✓
Occupancy Sensing	✓	✓
Scheduling		✓
Energy Monitoring		✓
Remote Access		✓
Manual Override		Wireless Wall Controller

PRODUCT DIMENSIONS

2-3/16" / 55mm



23" / 585mm

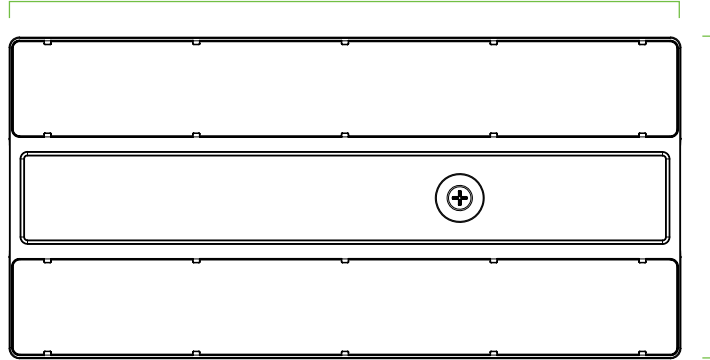


1" / 280mm


130W - 240W MODELS

Weight: 6.6 lbs / 3.0 kg
 Master Carton Weight: 9 lbs / 4.08 kg
 Dimensions: 26" x 4" X 12"
 LH1-130-50-U Pallet Quantity = 96 units
 Other 130W - 240W Models = 84 units

2-3/16" / 55mm



23" / 585mm

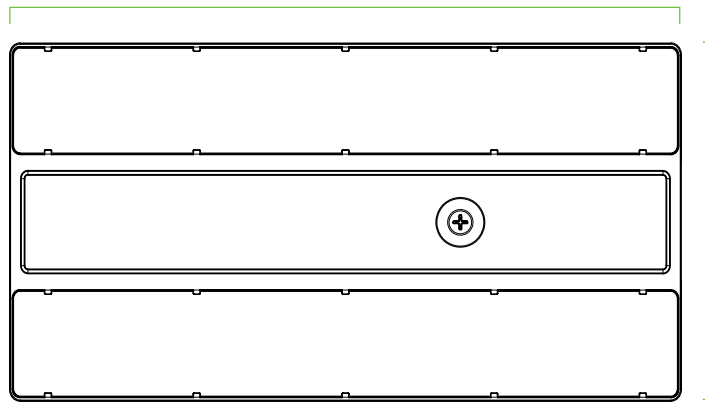


12-5/8" / 320mm


320W MODELS

Weight: 8.2 lbs / 3.7 kg
 Master Carton Weight: 9.8 lbs / 4.5 kg
 Dimensions: 25.5" x 3.75" X 13.5"
 Pallet Quantity = 80 units

2-3/8" / 60mm



29-1/2" / 750mm

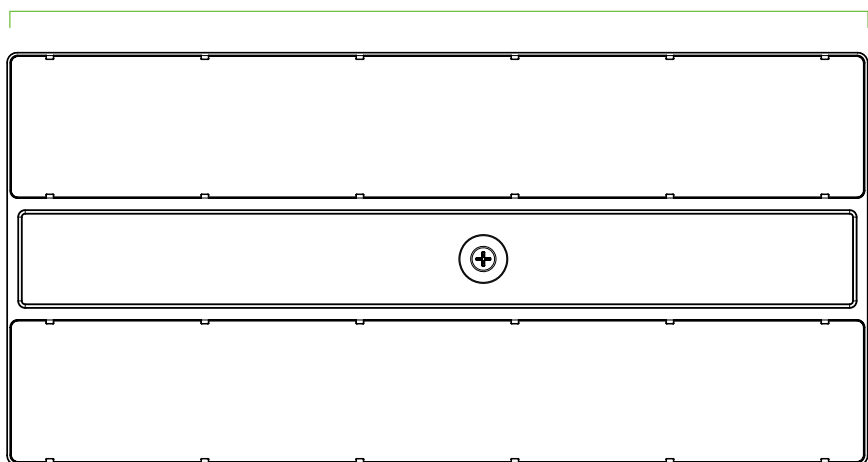

14-3/16" / 360mm

440W MODELS

Weight: 13.0 lbs / 5.9 kg
 Pallet Quantity = 56 units
 Master Carton Weight: 15 lbs / 6.8 kg
 Dimensions: 32" x 4" X 15"
 Pallet Quantity = 56 units

