



TWP1 Traditional Wall Pack

HIGHLIGHTS

- Traditional style matches the appearance of legacy products while also covering the same footprint
- 4 - 1/2" knockouts makes for versatile mounting
- Wall mount with or without junction box
- Integrated photocell for dusk to dawn operation (only on -U and -H models)
- Hinged removable door housing makes installation easier
- Glass lens
- PowerSet feature allows for multiple lumen stops out of the box
- FieldCCeT features provides multiple color temperature settings in one fixture

CERTIFICATIONS

- UL Listed for US & Canada
- RoHS compliant
- FCC compliant
- ICES-005 compliant
- IP65 Rated
- IK Pending
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- High efficacy, up to 135 lm/W
- Available in PowerSet model: power-selectable 45/35/25W; 80/70/60W; 120/105/90W
- Available in single CCT models: 4000 or 5000K or FieldCCeT models: field-selectable CCT 30/40/5000K
- CRI: >80
- Rated Life: >54,000 hours

ELECTRICAL

- Input voltage: 120-277V, 120-347V, 277-480V
- 0-10V dimming, dim-to-off
- Surge protection: 4kV
- Power factor: >0.9
- THD: <20%

THERMAL

- -40°F to 122°F (-40°C to 50°C) ambient operating temperature
- -13°F to 122°F (-25°C to 50°C) ambient operating temperature with photocell

CONSTRUCTION

- Bronze powder coated, die-cast aluminum housing
- Glass lens

DIMMING

- For dimming compatibility visit eiko.com

WARRANTY

- 5-Year limited warranty available online. Contact your Eiko sales rep for additional details.

KEY FEATURES

TRADITIONAL STYLE

Matches the appearance of legacy products

INTEGRATED PHOTOCELL

Manage security and safety with the integrated photocell (only on -U and -H models); it can easily be disabled in the field

INSTALLATION MADE EASY

4 - 1/2" knockouts, hinged door housing, can be mounted with or without junction box



project name	type
catalog number	voltage
approved by	date



APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security
- Perimeter Lighting

AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	WATTS*	CCT**	LUMENS	EFFICACY (lm/W)	VOLTAGE	TRADITIONAL WATTAGE EQUIVALENT	DLC ID #
									PREMIUM
	13651	TWP1-PS45-40-U	45/35/25W	4000K	6075/4725/3375 lm	135 lm/W	120-277V	Up to 100W HID	S-GNSMQI
	13653	TWP1-PS45-50-U	45/35/25W	5000K	6075/4725/3375 lm	135 lm/W	120-277V	Up to 100W HID	S-XVPLKT
	13654	TWP1-PS45-FCCT-U	45/35/25W	3000/4000/5000K	6075/4725/3375 lm	135 lm/W	120-277V	Up to 100W HID	S-GIEKB1
	13656	TWP1-PS45-FCCT-H	45/35/25W	3000/4000/5000K	6075/4725/3375 lm	135 lm/W	120-347V	Up to 100W HID	S-NPQ9IH
	13667	TWP1-PS45-FCCT-V	45/35/25W	3000/4000/5000K	6075/4725/3375 lm	135 lm/W	277-480V	Up to 100W HID	S-VGQ0EP
	13657	TWP1-PS80-40-U	80/70/60W	4000K	10,800/9450/8100 lm	135 lm/W	120-277V	Up to 250W HID	S-1AY8SC
	13659	TWP1-PS80-50-U	80/70/60W	5000K	10,800/9450/8100 lm	135 lm/W	120-277V	Up to 250W HID	S-SL830E
	13658	TWP1-PS80-40-H	80/70/60W	5000K	10,800/9450/8100 lm	135 lm/W	120-347V	Up to 250W HID	S-AQLWST
	13660	TWP1-PS80-FCCT-U	80/70/60W	3000/4000/5000K	10,800/9450/8100 lm	135 lm/W	120-277V	Up to 250W HID	S-YJKD61
	13662	TWP1-PS80-FCCT-H	80/70/60W	3000/4000/5000K	10,800/9450/8100 lm	135 lm/W	120-347V	Up to 250W HID	S-H54MS2
	13661	TWP1-PS80-FCCT-V	80/70/60W	3000/4000/5000K	10,800/9450/8100 lm	135 lm/W	277-480V	Up to 250W HID	S-SFYLEU
	13663	TWP1-PS120-40-U	120/105/90W	4000K	16,200/14,175/12,150 lm	135 lm/W	120-277V	Up to 400W HID	S-M163GK
	13665	TWP1-PS120-50-U	120/105/90W	5000K	16,200/14,175/12,150 lm	135 lm/W	120-277V	Up to 400W HID	S-G4CMLB
	13666	TWP1-PS120-FCCT-U	120/105/90W	3000/4000/5000K	16,200/14,175/12,150 lm	135 lm/W	120-277V	Up to 400W HID	S-V8SK5D
	13668	TWP1-PS120-FCCT-H	120/105/90W	3000/4000/5000K	16,200/14,175/12,150 lm	135 lm/W	120-347V	Up to 400W HID	S-B65CGK
	13667	TWP1-PS120-FCCT-V	120/105/90W	3000/4000/5000K	16,200/14,175/12,150 lm	135 lm/W	277-480V	Up to 400W HID	S-DB2EW6

* All power-selectable fixtures ship at the highest wattage setting

** All CCT-selectable fixtures ship at 5000K


MODEL CONFIGURATOR						
MODEL	-	WATTAGE	-	CCT	-	VOLTAGE
TWP1	-		-		-	

EXAMPLE PART NUMBER: TWP1-PS45-FCCT-U

BATTERY BACKUPS

ORDER	ORDER CODE	ITEM #	DESCRIPTION
	14654	EEBN08WHB300	EiKO Emergency Battery Kit Internal 8W, 120-347VAC 50-300VDC, High Temp 140°F, CEC Compliant. See spec sheet for full details.

PRODUCT DIMENSIONS

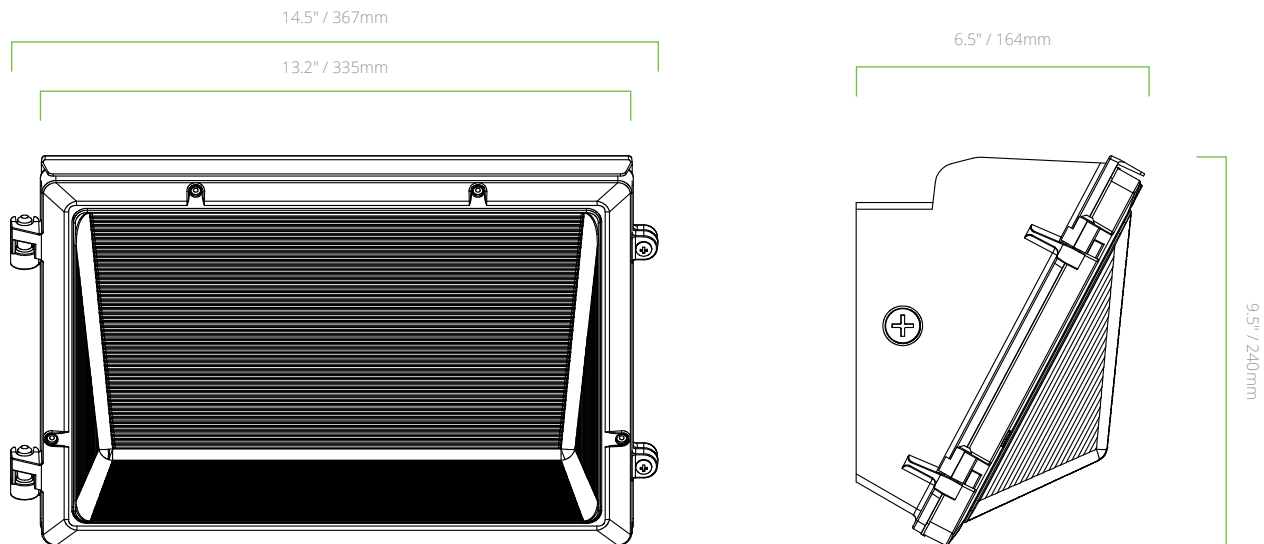

TWP1-ALL MODELS

7.8 lbs/3.5 kg