



PLL Type B LED PLL Lamps

HIGHLIGHTS

- Internal LED driver means no need to replace a ballast resulting in long-term maintenance savings
- Instantaneous full light output upon power-up
- Film coated glass construction reduces the risk of injury during glass breakage
- FieldCCeT models include multiple CCT's all in one lamp

CERTIFICATIONS

- DLC listed for 17W model
- UL Certified for US & Canada
- RoHS Compliant
- FCC Compliant
- ICES-005 Compliant
- Damp Location Rated

PERFORMANCE

- High efficacy: up to 129 lm/W
- Available in fixed wattage models: 8W, 10W, 16W, 17W
- Available in FieldCCeT models: 30/35/40/50/6500K
- CRI >80
- Rated Life: 50,000 hours

ELECTRICAL

- Input voltage: Type B - 120-277VAC
- Power Factor: >0.9
- THD: <20%
- Not suitable for use with dimmers

THERMAL

- -4°F to 113°F (-20°C to 45°C) ambient operating temperature*

CONSTRUCTION

- Film coated glass
- Polybutylene Terephthalate base

WARRANTY

- 5-Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

*Not recommended for air-tight fixtures

project name	type
catalog number	voltage
approved by	date



L8WPLL/BF/8FCCT/U/2G11



L10WPLL/BF/8FCCT/U/2G11



L16WPLL/BF/8FCCT/U/2G11





L17WPLL/BF/8FCCT/U/2G11



ORDER	ORDER CODE	ITEM #	WATTS (W)	LUMENS (lm)	CCT (K)	EFFICACY (lm/W)	VOLTAGE (V)	INSTALL POSITION	BEAM ANGLE	TRADITIONAL WATTAGE EQUIVALENT	DLC ID #
	15478	L8WPLL/BF/8FCCT/U/2G11	8	900	3000/3500/4000/5000/6500	112	120-277	Horizontal	200	18W	n/a
	15479	L10WPLL/BF/8FCCT/U/2G11	10	1,250	3000/3500/4000/5000/6500	125	120-277	Horizontal	200	24W	n/a
	15480	L16WPLL/BF/8FCCT/U/2G11	16	2,000	3000/3500/4000/5000/6500	125	120-277	Horizontal	200	36W	n/a
	15481	L17WPLL/BF/8FCCT/U/2G11	17	2,200	3000/3500/4000/5000/6500	129	120-277	Horizontal	200	40W	S-8ZS50D

PRODUCT DIMENSIONS

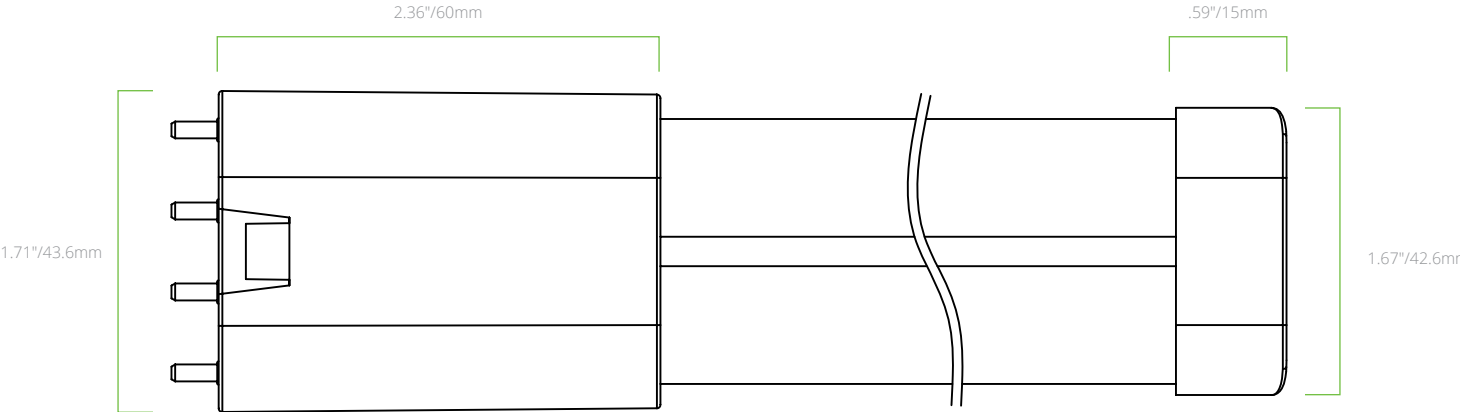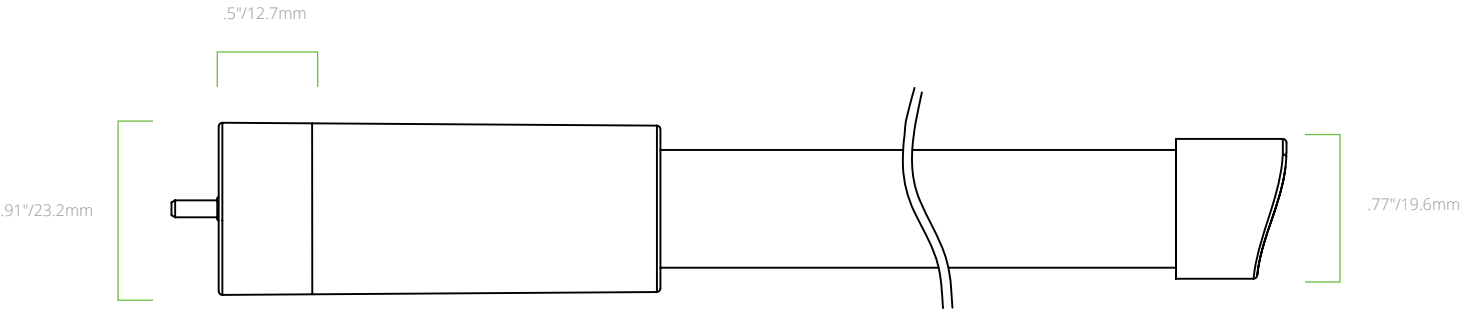

L8WPLL/BF/8FCCT/U/2G11

8.46"/215mm

L10WPLL/BF/8FCCT/U/2G11

12.2"/310mm

L16WPLL/BF/8FCCT/U/2G11

15.94"/405mm

L17WPLL/BF/8FCCT/U/2G11

21.85"/555mm