



## EMERGENCY BACKUP FOR BYPASS TUBES

### DESCRIPTION

An emergency backup battery for select EiKO ballast bypass LED tubes.

### FEATURES


- Provides emergency backup power to a single bypass tube for 90 minutes at 5 watts
- Functions with EiKO single- and double-ended bypass tubes

### WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

### APPLICATIONS

- Battery backup

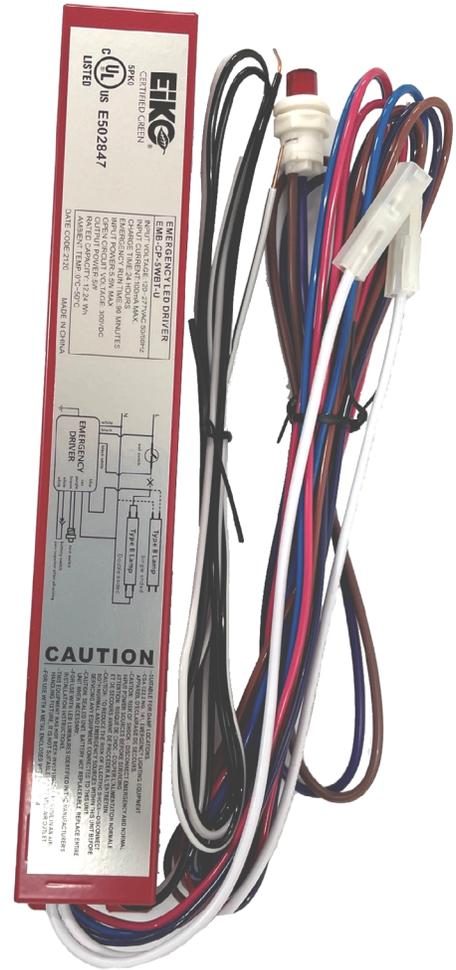


<b>INPUT</b>	Input Voltage	120-277VAC
	Frequency Range	50/60Hz
	Max. Power	5W
	Max. Standby Power	1.8W
<b>OUTPUT</b>	Output Power	5W
	Emergency Time	90 min @ 5W
	Output Open Protection	Yes
	Overpower Protection	Yes
<b>OTHER INFORMATION</b>	Compatibility	Bypass Tubes (Single tube not to exceed 50W)
	Operation Temperature	32°F to 122°F (0°C to 50°C)
	Battery Type	Lithium Ion
	Battery Capacity	850mAh 14.8V
	Charge Current	160mA
	Recharge Time	Min. 24 hrs.
	Certification	cULus Listed; Title 20; - Battery temperature must not exceed 122°F (50°C)


## PERFORMANCE SUMMARY

Order Code	Item #	Input Voltage	Frequency Range	Output Power	Max Standby Power	Emergency Time	Recharge Time
10361	EMB-CP-5WBT-U	120-277V	50/60Hz	5W	1.8W	90 min @ 5W	≤24 hrs

## WIRING DIAGRAM

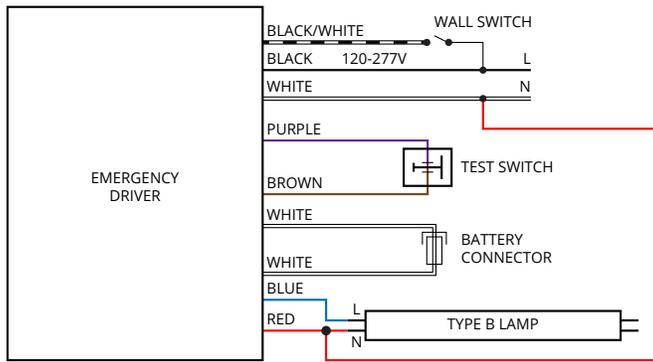

Single Ended Operation

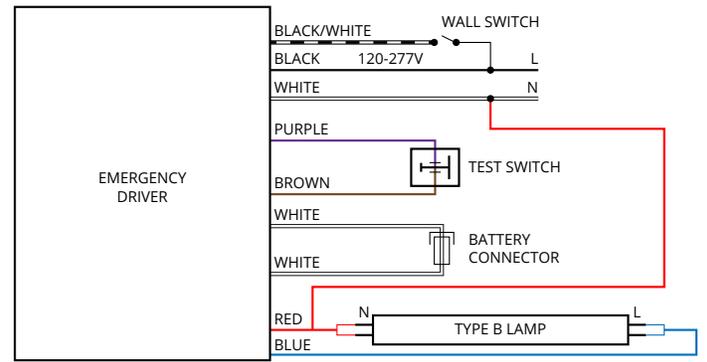

Double Ended Operation

## COMPATIBILITY

Order Code	Item	Lumens
15179	L8WT8/24/ABSDG/U/FCCT	715
12942	L9.5WT8/48/BSDG/835	840
12940	L9.5WT8/48/BSDG/840	865
12938	L9.5WT8/48/BSDG/850	865
12946	L9WT8/24/BSDG/840	635
12937	L9WT8/24/BSDG/FCCT	635
15195	L10.5WT8/48/BSDG/H/FCCT	735
15181	L11WT8/36/ABSDG/U/FCCT	750
12928	L12WT8/36/BSDG/840	600
12951	L12WT8/36/BSDG/FCCT	600
15183	L12WT8/48/ABSDG/U/FCCT	750
12941	L12WT8/48/BSDG/840	750
12947	L12WT8/48/BSDG/850	750
12933	L14WT8/48/BSDG/FCCT	640
15185	L15WT8/48/ABSDG/U/FCCT	735
12954	L15WT8/48/BSDG/835	700
12936	L15WT8/48/BSDG/840	730
12958	L15WT8/48/BSDG/850	730
15196	L15WT8/48/BSDG/H/FCCT	735

**Note:** Backup Lumens = 5W \* Efficacy of the LED Bypass Tube.

## DIMENSIONS

