



# LH2 PRO LINEAR HIGH BAY




## THE RIGHT OPTIC FOR EVERY JOB.

Total Optical Control because every job is different.

Every warehouse job is different. The LH2 Pro was built around that reality. The broadest optical range, the widest lumen output, and the most compact form factor of any linear high bay platform on the market.

### OS Models

Three field-adjustable distributions per SKU.

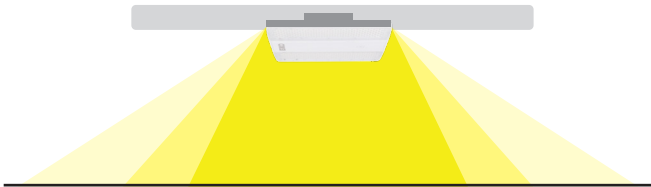

- Narrow 45x100°** - High ceiling and tight racking
- Medium 65x95°** - Standard racking applications
- Wide 90x90°** - Open floors & general warehouse

### OS30 Models

FIRST TO MARKET

Specify for high-rack warehouse aisles.



- Aisle 30x90°** - High-rack aisle targeting
- Medium 50x90°** - Standard racking applications
- Wide 90x100°** - Open floors & general warehouse

30°, 50° and 90° distributions on one SKU delivering equivalent light levels with up to 40% fewer fixtures than standard high bays.



**3** Distributions

Wide, Medium, Narrow

No re-order. No swapping lenses. Just flip the switch.



**3** CCTs

3500/4000/5000K

No special orders for 3500K. Field-adjustable



**3** Power Settings

Max, Mid, Min

Match lumen output to the application on site.

### VOLTAGE

120 - 347V  
277 - 480V

Canada & US Ready

120-347V covers Canada & US. 277-480V completes US coverage.



Contact your EIKO Representative today

eiko.com

# FOUR SIZES. 100W TO 400W. UP TO 58,300 LM.



**PS160: 160/130/100W**  
17,600 - 23,700 LM



**PS240: 240/210/180W**  
27,100 - 35,400 LM



**PS320: 320/290/260W**  
39,000 - 47,600 LM



**PS400: 400/360/320W**  
45,000 - 58,300 LM

1.9" profile and up to 27% more compact than competing high bays for faster installation at height.

## MOUNTING OPTIONS



Aircraft Cable  
V-hooks · 6.5ft  
Included with every  
fixture



Threaded Rod &  
Surface Mount  
LH2-TRSMK



Pendant  
Mount  
LH2-PMK

## CONTROLS READY



Standalone PIR sensor,  
12-24V  
SENA-SPPR-WH



Standalone Microwave  
sensor, 12-24V  
SENA-SPMR-WH



Bluetooth PIR Motion  
sensor, 12-24V  
SENA-WPPA-WH



Commissioning Tool for  
standalone sensors  
SENA-ACT


## ACCESSORIES



### Battery Backup

Field or factory installed emergency  
battery options available.

Purchase LH2-ZBRK mounting kit for  
field install



### Wire Guards

Wire guards in each size for  
added protection

## SPECIFICATIONS

ORDER CODE	MODEL #	WATTS (W)	CCT (K)	LUMENS (LM)	LIGHT DISTRIBUTION
<b>120-347V</b>					
15884	LH2-PS160-OS-8FCCT-HDIM	160/130/100W	3500/4000/5000	23,700/20,000/17,600	45x100°, 65x95°, 90x90°
15672	LH2-PS160-OS-8FCCT-HDIM-CORD*	160/130/100W	3500/4000/5000	23,700/20,000/17,600	45x100°, 65x95°, 90x90°
15886	LH2-PS240-OS-8FCCT-HDIM	240/210/180W	3500/4000/5000	35,400/32,700/27,100	45x100°, 65x95°, 90x90°
15668	LH2-PS240-OS30-8FCCT-HDIM	240/210/180W	3500/4000/5000	34,200/31,700/26,300	30x90°, 50x90°, 90x100°
15673	LH2-PS240-OS-8FCCT-HDIM-CORD*	240/210/180W	3500/4000/5000	35,400/32,700/27,100	45x100°, 65x95°, 90x90°
15888	LH2-PS320-OS-8FCCT-HDIM	320/290/260W	3500/4000/5000	47,600/43,500/39,000	45x100°, 65x95°, 90x90°
15670	LH2-PS320-OS30-8FCCT-HDIM	320/290/260W	3500/4000/5000	45,800/40,600/35,400	30x90°, 50x90°, 90x100°
15674	LH2-PS320-OS-8FCCT-HDIM-CORD*	320/290/260W	3500/4000/5000	47,600/43,500/39,000	45x100°, 65x95°, 90x90°
15890	LH2-PS400-OS30-8FCCT-HDIM	400/360/320W	3500/4000/5000	58,300/51,100/45,000	30x90°, 50x90°, 90x100°
<b>277-480V</b>					
15885	LH2-PS160-OS-8FCCT-VDIM	160/130/100W	3500/4000/5000	23,700/20,000/17,600	45x100°, 65x95°, 90x90°
15887	LH2-PS240-OS-8FCCT-VDIM	240/210/180W	3500/4000/5000	35,400/32,700/27,100	45x100°, 65x95°, 90x90°
15669	LH2-PS240-OS30-8FCCT-VDIM	240/210/180W	3500/4000/5000	34,200/31,700/26,300	30x90°, 50x90°, 90x100°
15889	LH2-PS320-OS-8FCCT-VDIM	320/290/260W	3500/4000/5000	47,600/43,500/39,000	45x100°, 65x95°, 90x90°
15671	LH2-PS320-OS30-8FCCT-VDIM	320/290/260W	3500/4000/5000	45,800/40,600/35,400	30x90°, 50x90°, 90x100°
15891	LH2-PS400-OS30-8FCCT-VDIM	400/360/320W	3500/4000/5000	58,300/51,100/45,000	30x90°, 50x90°, 90x100°

Default settings: Max power, 5000K CCT. OS models 90x90°. OS30 models 30x90°

\* Fixture includes 10ft power cord