



COVERS **EVERY** JOB.

Power, color temperature, and beam angle. All adjustable. All in the box.

KEY FEATURES

- Compact, lightweight design enabling single person installation.
- 3 sizes - PS150, PS240, PS300. Up to 48,000 lm.
- Covers 120-347V and 277-480V for US and Canadian installations.
- NEMA 4X, IP65, NSF, and IK08 rated for demanding industrial environments.
- Standard 6kV surge protection.
- Controls Ready with integral sensor receptacle for PIR, microwave, or networked controls (Silvair). 0-10V dimming standard.
- Includes 6ft power and dimming cord with mounting hook.

SET SYSTEM



PowerSET
3 power settings



ColorSET
3500/4000/5000K



OpticSET
60°/90°

ACCESSORIES



Hook Mount
Included



Yoke Mount
Surface mount with adjustable aiming



Pipe Adaptor
M10 to 3/4" for pendant mount applications



Emergency Battery Pack
Field or factory installed for code compliance



Aluminum Reflector
Sleek finish for a clean industrial look



Prismatic Reflector & Cone Lens
Softened aesthetic for retail



Wire Guard
Protection for impact-prone environments




Sensor (PIR / Microwave / BLE)
Plug & play. No wiring required.



BAYE4 ROUND HIGH BAY

APPLICATIONS

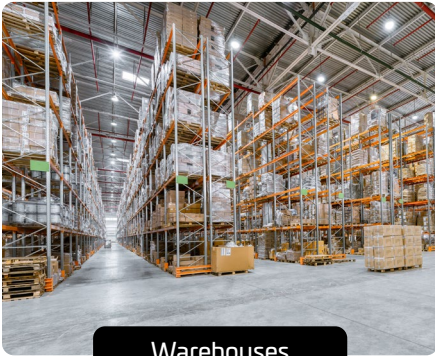


Warehouses




Gymnasiums



Manufacturing

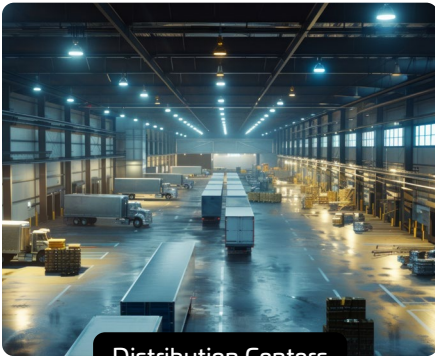

Distribution Centers

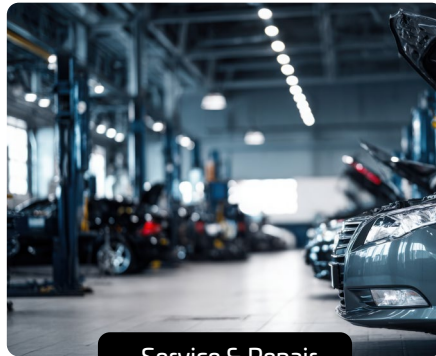

Service & Repair



Food Storage

AVAILABLE MODELS

ORDER CODE	MODEL #	WATTS (W)	CCT (K)	LUMENS (LM)	LIGHT DISTRIBUTION
120-347V					
15862	BAYE4-PS150-OS-8FCCT-HDIM	150/120/100	3500/4000/5000	22,500/18,600/16,000	60/90
16458	BAYE4-PS150-OS-8FCCT-HDIM-WH*	150/120/100	3500/4000/5000	22,500/18,600/16,000	60/90
15866	BAYE4-PS240-OS-8FCCT-HDIM	240/200/150	3500/4000/5000	36,000/31,000/24,000	60/90
16459	BAYE4-PS240-OS-8FCCT-HDIM-WH*	240/200/150	3500/4000/5000	36,000/31,000/24,000	60/90
15868	BAYE4-PS300-OS-8FCCT-HDIM	300/240/200	3500/4000/5000	45,000/37,200/32,000	60/90
277-480V					
15865	BAYE4-PS150-OS-8FCCT-VDIM	150/120/100	3500/4000/5000	22,500/18,600/16,000	60/90
15867	BAYE4-PS240-OS-8FCCT-VDIM	240/200/150	3500/4000/5000	36,000/31,000/24,000	60/90
15869	BAYE4-PS300-OS-8FCCT-VDIM	300/240/200	3500/4000/5000	45,000/37,200/32,000	60/90

Default Settings: Max power, 90 deg light distribution, 5000K CCT

* White finish SKUs



NEMA 4X



IP65

IK08



RoHS Compliant

FC

CAN ICES-005



View Spec Sheet

Need a lighting layout?

Contact your EiKO Representative today!