EXIT/EMERGENCY

project name	type
catalog number	
comments	voltage
approved by	date

FEATURES
- Easy to install
- Long battery life
- Environmentally friendly
- Energy saving
- Single and double-sided installation
- Wall and ceiling mountable

LISTINGS
- UL Listed for Dry/Damp locations
- Safety and performance in accordance with UL-924
- Title 20 and Title 24 (JA8) Compliant (90CRI models only)

PERFORMANCE
- ≥90 minutes of emergency operating power at the rated wattage

ELECTRICAL SPECIFICATIONS
- Input voltage: 120/277V
- Input power: 1W/3.5W/4W
- Power Factor: >0.5
- Emergency operation: ≥90 mins
- Recharge: 24 hrs

THERMAL
- 32°F to 104°F (0°C to 40°C) operating temperature

CONSTRUCTION
- Injection molded ABS and polycarbonate housings

WARRANTY
- 3 year limited warranty; see eiko.com for warranty details



EXIT-R



EXIT/EM-R



EML

(Fixtures available in white or black housing)

APPLICATIONS
- Emergency and exit lighting

EML only

ORDERING INFORMATION


EXAMPLE: EXIT/EM-R-BK

Model	Sign Color	Housing Color
EXIT - Exit Sign **EML** - Emergency Light **EXIT/EM** - Exit Sign with Emergency Light	**R** - Red	**W** - White **BK** - Black


PERFORMANCE SUMMARY

Order Code	Item #	Lumens	Description
11033	EXIT-R-W	100	Exit Sign Red White Housing
11037	EXIT/EM-R-W	100	Exit Sign Red with Emergency Light White Housing
11039	EXIT/EM-R-BK	100	Exit Sign Red with Emergency Light Black Housing
11041	EML-W	100	Emergency Light White Housing


DIMENSIONS

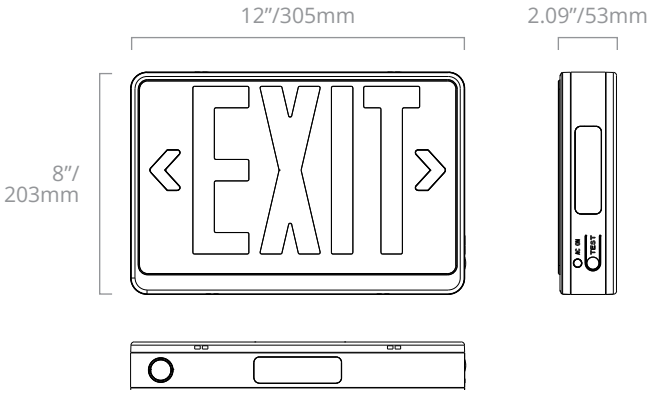

EXIT
(includes second face plate)

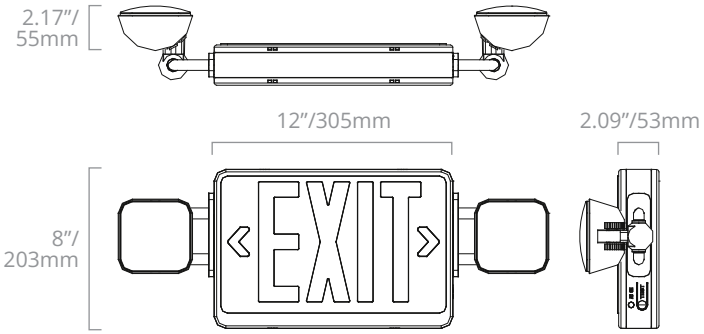

EXIT/EM
(includes second face plate)

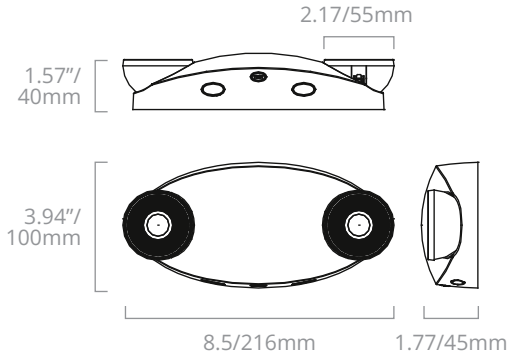

EML

Rev. 11/4/26

©2019 EiKO Global, LLC. World Headquarters: 23220 W. 84th Street, Shawnee, KS 66227 (P) 1.800.852.2217 (F) 1.800.492.8975
EiKO Global Canada, LLC: 81 King Street, Barrie, ON L4N 6B5 Canada (P) 1.888.410.8151 (F) 1.888.705.1335 | eiko.com