



TYPE B EMERGENCY LED TUBE

PowerSET. ColorSET.
FIRST TO MARKET.


First Emergency Tube with PowerSET + ColorSET Technology

- **PowerSET:** 16W/14W/12W field-selectable
- **ColorSET:** 3000K/3500K/4000K/
5000K/6500K
- **Perfect Matching:** Set to match most TLED
lumen & CCT outputs

One emergency tube matches
1600 - 2200 lumen TLEDs



Meets **UL924** requirements

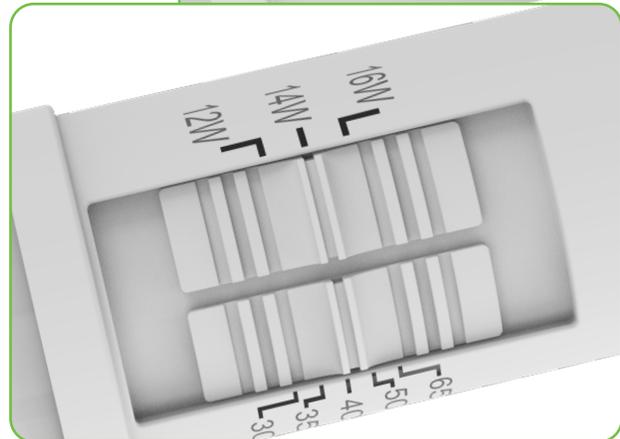

Features & Benefits


1. UL 924 TWIST-LOCK: No screws or brackets - meets UL 924 requirements.




2. COMPLETE SOLUTION: Tube + lamp holders + test button included



3. TYPE B DIRECT WIRE: Ballast bypass - direct wiring to line voltage

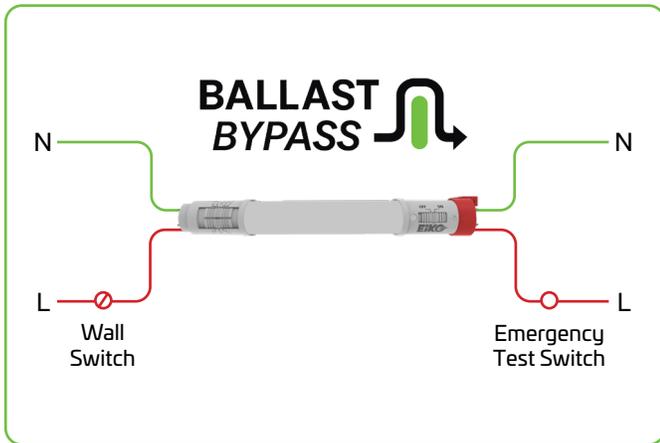

4. EXTENDED RUNTIME: 500 lumens for 90 minutes during power outages

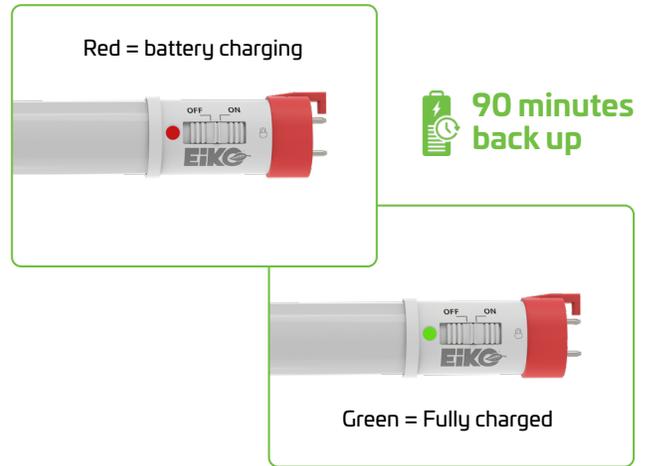

Specifications

NAME	SIZE	VOLTAGE (V)	WATTS (W)	LUMENS (lm)	CCT (K)	EFFICACY (lpW)	CRI
LPS16T10-48-BDP-8FCCT-U-EM	4ft	120-277V	16/14/12W	12W: 1600/1600/1650/1650/1600	3000/3500K	130	>80
				14W: 1800/1800/1900/1900/1800		4000/5000/6500K	
				16W: 2100/2150/2200/2200/2150			
				Emergency Output: 500 lm at 4000K CCT			

FIRST TO MARKET

Contact your EIKO Sales Representative for pricing and availability